

Zip Pro DALI



Zip Pro 3-Circuit White 3710lm 4000K Ra>90 DALI-2

Article code: 320731
EAN: 7021983207319



Electrical

System wattage: 40W
Voltage: 220-240V
Frequency (Hz): 50/60Hz
Max. luminaires per circuit breaker: B10: 31, B16: 50, C10: 52, C16: 85

Light technic

Type of light source: LED
Luminous flux: 3710lm
Efficacy: 93 lm/W
Colour temperature: 4000K
Colour rendering (Ra): Ra>90
MacAdams factor: SDCM: 2
Lifetime: L90/B10>100,000
Maximum ambient temperature: 35°C
Lifetime at max ambient temperature: L90/B10>100,000
Light distribution: Direct
Optic: Reflector
Beam angle: 40°
UGR: UGR<22
Photobiological safety: RG 0

Control/Dimming

Type: DALI-2

Protection

Luminaire class: Class I
IP Class: IP20

Energy and approvals

Contains light source of energy class: E
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Colour: Matte white (RAL 9003)
Optics: Tempered glass

Mounting/Connection



Mounting: Surface, Indoor
Connection: ShopLine DALI track (adapter included)

Dimensions

Length (mm) L: 218
Width (mm) W: 100
Height (mm) H: 148
Diameter (mm) D: 100
Weight (kg) gross/net: 1.345 / 1.158

Packaging

Packing dimensions (mm): 253 x 250 x 110

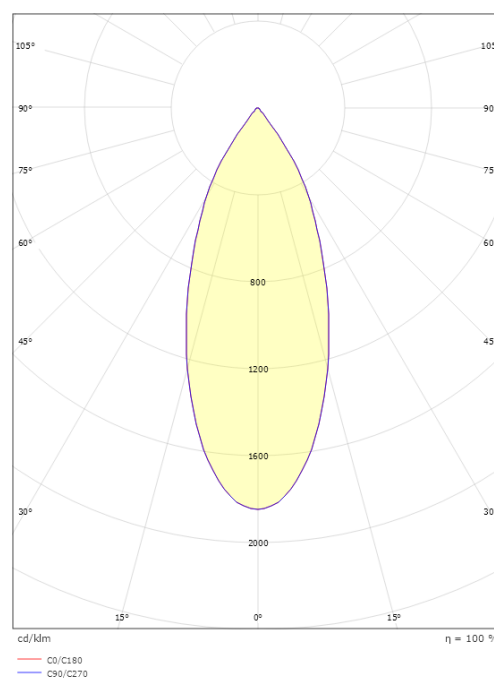

7 0 2 1 9 8 3 2 0 7 3 1 9