

Zip Aneto Mini



Zip Aneto Mini Black 570lm 3000K Ra>90 Trailing edge

Article code: 320796
EAN: 7021983207968



Electrical

Wattage: 6,5W
System wattage: 6.5W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 180, B16: 300, C10: 180, C16: 300

Light technic

Type of light source: LED
Luminous flux: 570lm
Efficacy: 88 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra>90
MacAdams factor: SDCM: 2
Lifetime: L80/B20>100,000
Light distribution: Direct
Optic: Lens
Beam angle: 42°
UGR: UGR<19
Visible flicker (PstLM): 0.01
Stroboscopic flicker (SVM): 0.02

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class II
IP Class: IP20

Energy and approvals

Contains light source of energy class: F

Materials and finish

Housing: Aluminium

Mounting/Connection



Mounting: Surface, Indoor
Connection: Zip track (adapter included)

Dimensions

Height (mm) H: 85
Diameter (mm) D: 65
Weight (kg) gross/net: 0.37 / 0.31

Packaging

Packing dimensions (mm): 140 x 70 x 115

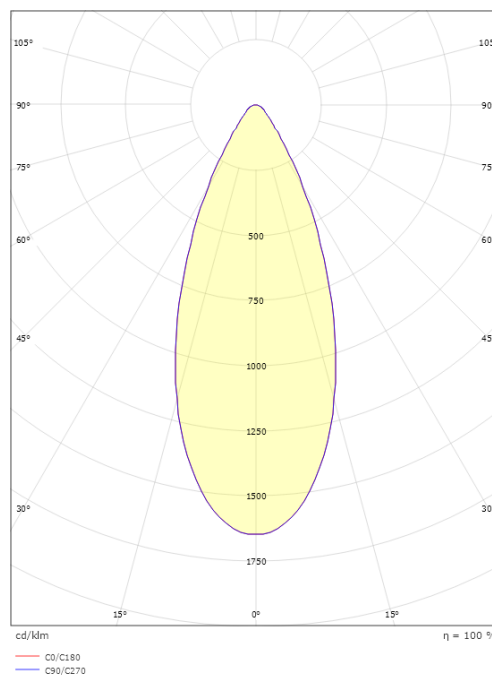

7 0 2 1 9 8 3 2 0 7 9 6 8