

Inspire S 300 Black 950lm 3000K Ra 98 DALI-2 / Push Dim

Article code: 320836
EAN: 7021983208361



Electrical

System wattage: 15W
Voltage: 220-240V
Frequency (Hz): 50/60Hz
Max. luminaires per circuit breaker: B10: 32, B16: 50, C10: 52, C16: 85

Light technic

Type of light source: LED
Luminous flux: 950lm
Efficacy: 63 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra 98
MacAdams factor: SDCM: 2
Lifetime: L90/B10>100,000
Light distribution: Direct
Beam angle: 55°
Visible flicker (PstLM): 0.1
Stroboscopic flicker (SVM): 0.03

Control/Dimming

Type: DALI-2 / Push Dim
Driver: 400mA

Protection

Luminaire class: Class I
IP Class: IP20

Energy and approvals

Contains light source of energy class: E
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Colour: Black (RAL 9004)

Mounting/Connection


Mounting: Indoor
Module: 300
Connection: Screwless terminal block

Dimensions

Length (mm) L: 300
Width (mm) W: 59
Height (mm) H: 85
Weight (kg) gross/net: 1.149 / 1.048

Packaging

Packing dimensions (mm): 310 x 93 x 69

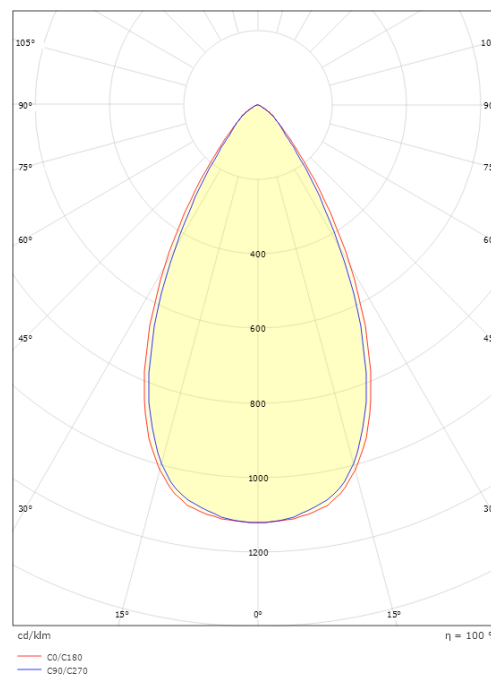

7 0 2 1 9 8 3 2 0 8 3 6 1