

Inspire S 300 Black 980lm 4000K Ra 98 DALI-2 / Push Dim

Article code: 320837
EAN: 7021983208378




Electrical

System wattage:	15W
Voltage:	220-240V
Frequency (Hz):	50/60Hz
Max. luminaires per circuit breaker:	B10: 32, B16: 50, C10: 52, C16: 85



Light technic

Type of light source:	LED
Luminous flux:	980lm
Efficacy:	65 lm/W
Colour temperature:	4000K
Colour rendering (Ra):	Ra 98
MacAdams factor:	SDCM: 2
Lifetime:	L90/B10>100,000
Light distribution:	Direct
Beam angle:	55°
Visible flicker (PstLM):	0.1
Stroboscopic flicker (SVM):	0.03

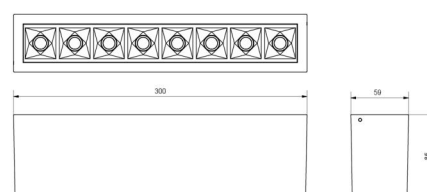

Control/Dimming

Type: DALI-2 / Push Dim
Driver: 400mA

Protection

Luminaire class: Class I
IP Class: IP20

Energy and approvals

Contains light source of energy class:	E
Breeam:	Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Colour: Black (RAL 9004)

Mounting/Connection

Mounting:	Indoor
Module:	300
Connection:	Screwless terminal block

Dimensions

Length (mm) L:	300
Width (mm) W:	59
Height (mm) H:	85
Weight (kg) gross/net:	1.149 / 1.048

Packaging

Packing dimensions (mm): 310 x 93 x 69

