

# Tube Pro DALI



## Tube Pro 3-Circuit White 3830lm 4000K Ra>90 DALI-2

Article code: 320855  
EAN: 7021983208552



### Electrical

System wattage: 41W  
Voltage: 220-240V  
Frequency (Hz): 50/60Hz  
Max. luminaires per circuit breaker: B10: 32, B16: 50, C10: 50, C16: 85

### Light technic

Type of light source: LED  
Luminous flux: 3830lm  
Efficacy: 93 lm/W  
Colour temperature: 4000K  
Colour rendering (Ra): Ra>90  
MacAdams factor: SDCM: 2  
Lifetime: L90/B10>100,000  
Maximum ambient temperature: 35°C  
Lifetime at max ambient temperature: L90/B10>50,000  
Light distribution: Direct  
Optic: Reflector  
Beam angle: 32°  
UGR: UGR<10  
Visible flicker (PstLM): 0.01  
Stroboscopic flicker (SVM): 0

### Control/Dimming

Type: DALI-2  
Driver: 1050mA

### Protection

Luminaire class: Class II  
IP Class: IP20

### Energy and approvals

Contains light source of energy class: E  
Breeam: Fulfils Hea 01 for flicker free lighting

### Materials and finish

Housing: Aluminium  
Optics: Glass

### Mounting/Connection



Mounting: Surface, Indoor  
Connection: ShopLine DALI track (adapter included)

### Dimensions

Length (mm) L: 278  
Width (mm) W: 260  
Height (mm) H: 92  
Weight (kg) gross/net: 1.45 / 1.11

### Packaging

Packing dimensions (mm): 285 x 225 x 100

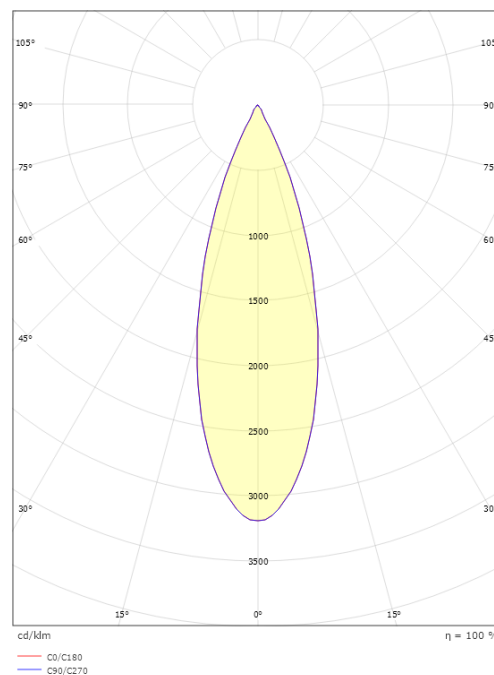

7 0 2 1 9 8 3 2 0 8 5 5 2