

Tube Pro DALI



Tube Pro 3-Circuit Black 3830lm 4000K Ra>90 DALI-2

Article code: 320857
EAN: 7021983208576



Electrical

System wattage: 41W
Voltage: 220-240V
Frequency (Hz): 50/60Hz
Max. luminaires per circuit breaker: B10: 32, B16: 50, C10: 50, C16: 85

Light technic

Type of light source: LED
Luminous flux: 3830lm
Efficacy: 93 lm/W
Colour temperature: 4000K
Colour rendering (Ra): Ra>90
MacAdams factor: SDCM: 2
Lifetime: L90/B10>100,000
Maximum ambient temperature: 35°C
Lifetime at max ambient temperature: L90/B10>50,000
Light distribution: Direct
Optic: Reflector
Beam angle: 32°
UGR: UGR<10
Visible flicker (PstLM): 0.01
Stroboscopic flicker (SVM): 0

Control/Dimming

Type: DALI-2
Driver: 1050mA

Protection

Luminaire class: Class II
IP Class: IP20

Energy and approvals

Contains light source of energy class: E
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Optics: Glass

Mounting/Connection



Mounting: Surface, Indoor
Connection: ShopLine DALI track (adapter included)

Dimensions

Length (mm) L: 278
Width (mm) W: 260
Height (mm) H: 92
Weight (kg) gross/net: 1.45 / 1.11

Packaging

Packing dimensions (mm): 285 x 225 x 100

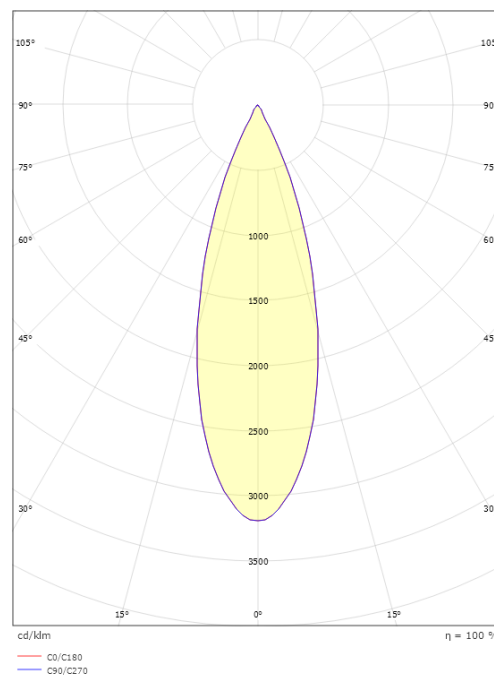

7 0 2 1 9 8 3 2 0 8 5 7 6