

Zip Tube Micro



Zip Tube Micro Brass 360lm 2700K Ra 98 Trailing edge

Article code: 320870
EAN: 7021983208705



Electrical

System wattage: 7W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 180, B16: 290, C10: 180, C16: 290

Light technic

Type of light source: LED
Luminous flux: 360lm
Efficacy: 51 lm/W
Colour temperature: 2700K
Colour rendering (Ra): Ra 98
MacAdams factor: SDCM: 2
Lifetime: L90/B10>50,000
Light distribution: Direct
Optic: Reflector medium
Beam angle: 40°
UGR: UGR<19

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class II
IP Class: IP20

Energy and approvals

Contains light source of energy class: F
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Optics: UV-stabilized polycarbonate

Mounting/Connection




Mounting: Surface, Indoor
Connection: Zip track (adapter included)

Dimensions

Length (mm) L: 135
Width (mm) W: 39
Height (mm) H: 135
Weight (kg) gross/net: 0.31 / 0.25

Packaging

Packing dimensions (mm): 135 x 39 x 135

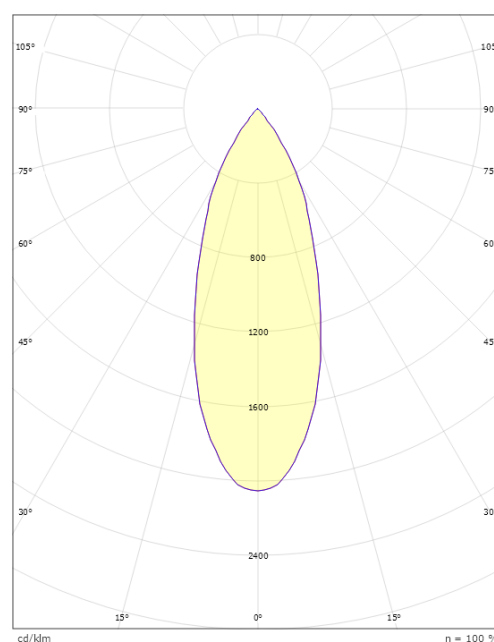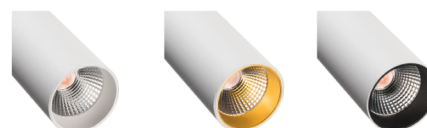

cd/klm
— C0/C180
— C90/C270

$\eta = 100\%$



7 0 2 1 9 8 3 2 0 8 7 0 5