

Inspire R



Inspire R Black 600 2980lm 3000K Ra>80 Trailing edge / Linect

Article code: 320900
EAN: 7021983209009



Electrical

System wattage: 23W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 19, B16: 30, C10: 31, C16: 51

Light technic

Type of light source: LED
Luminous flux: 2980lm
Efficacy: 130 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L70/B10>100,000
Lifetime: L80/B10>70,000
Light distribution: Direct
Optic: Cubic Optic Black
Beam angle: 60°
UGR: UGR<19
Visible flicker (PstLM): 0.01
Stroboscopic flicker (SVM): 0
Photobiological safety: RG 1

Control/Dimming

Type: Trailing edge / Linect

Protection

Luminaire class: Class II SELV
IP Class: IP20

Energy and approvals

Contains light source of energy class: D
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Optics: Polycarbonat (PC)

Mounting/Connection



Mounting: Recessed, Indoor
Module: Recessed
Connection: Screwless terminal block

Dimensions

Length (mm) L: 595
Width (mm) W: 62
Height (mm) H: 40
Weight (kg) gross/net: 0.961 / 0.811

Packaging

Packing dimensions (mm): 885 x 85 x 43

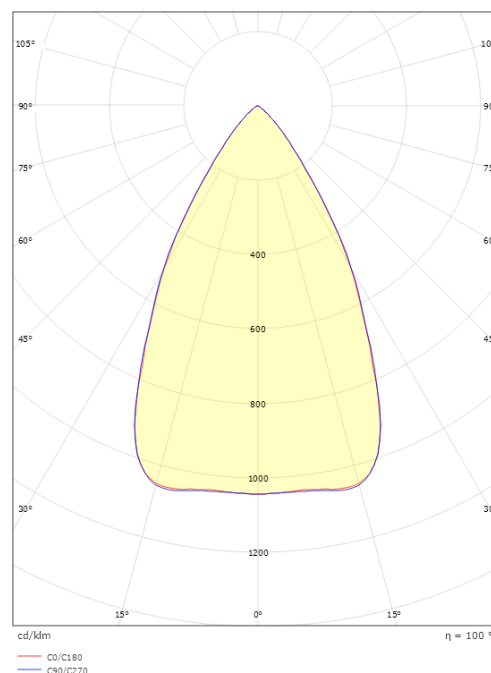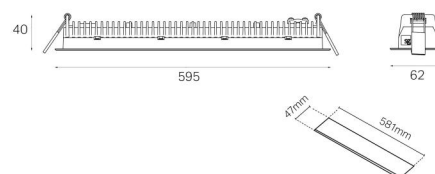

7 0 2 1 9 8 3 2 0 9 0 0 9