

Zip Pro Mini 3-Circuit



Zip Pro Mini 3-Circuit White 1280lm 3000K Ra>90 Trailing edge

Article code: 3464
EAN: 7021980034642



Electrical

Wattage: 16W
System wattage: 19W
Voltage: 220-240V

Light technic

Type of light source: LED
Luminous flux: 1280lm
Efficacy: 67 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra>90
MacAdams factor: SDCM: 2
Lifetime: L80/B20>50,000
Light distribution: Direct
Optic: Reflector
Beam angle: 40°
UGR: UGR<25
Photobiological safety: RG 1

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class I
IP Class: IP20

Energy and approvals

Contains light source of energy class: F
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Colour: Matte white (RAL 9003)
Optics: Tempered glass

Mounting/Connection


Mounting: Surface, Indoor
Connection: ShopLine track (adapter included)

Dimensions

Length (mm) L: 156
Width (mm) W: 70
Height (mm) H: 205
Weight (kg) gross/net: 0.972 / 0.81

Packaging

Packing dimensions (mm): 195 x 80 x 200

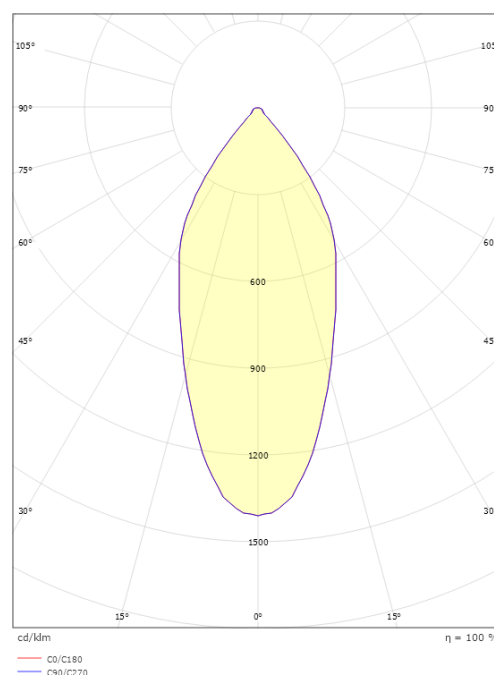

7 0 2 1 9 8 0 0 3 4 6 4 2