

# Zip Zoom 1-Circuit



## Zip Zoom Brushed steel 280lm 3000K Ra>90 Trailing edge

Article code: 3517  
EAN: 7021980035175

• = This article is produced by order, with an expected delivery time of 3-4 weeks.



### Electrical

System wattage: 6W  
Voltage: 220-240V

### Light technic

Type of light source: LED  
Socket: GU10  
Light source included: Yes  
Luminous flux: 280lm  
Efficacy: 47 lm/W  
Colour temperature: 3000K  
Colour rendering (Ra): Ra>90  
MacAdams factor: SDCM: 2  
Lifetime: L70/B50>50,000  
Light distribution: Direct  
Beam angle: 36°

### Control/Dimming

Type: Trailing edge

### Protection

Luminaire class: Class II  
IP Class: IP20

### Energy and approvals

Contains light source of energy class: G  
Breeam: Fulfils Hea 01 for flicker free lighting

### Materials and finish

Housing: Aluminium, PA66 frontring, steel arm.  
Colour: Brushed steel

### Mounting/Connection



Mounting: Surface, Indoor  
Connection: Zip track (adapter included)

### Dimensions

Length (mm) L: 78  
Width (mm) W: 73  
Height (mm) H: 128  
Distance to flammable materials: 50mm  
Weight (kg) gross/net: 0.338 / 0.338

### Packaging

Packing dimensions (mm): 135 x 85 x 110

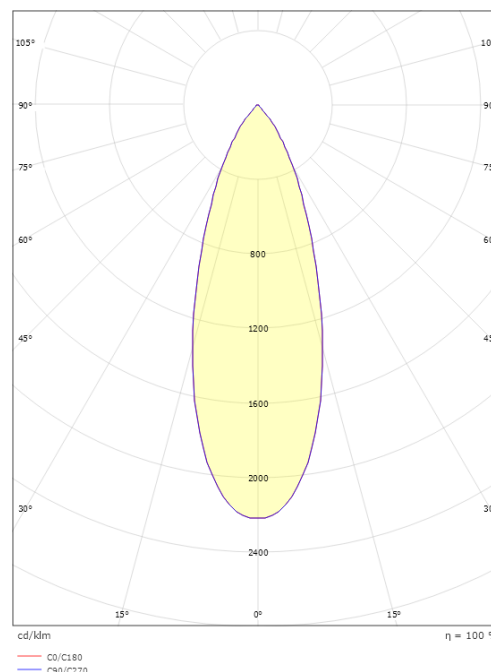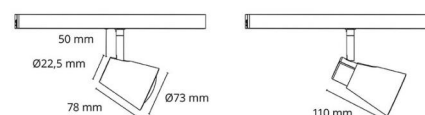

7 0 2 1 9 8 0 0 3 5 1 7 5