

Safir White 840lm 3000K Ra>80 Trailing edge

Article code: 597104
 EAN: 7021985971041


Electrical

System wattage: 8W
 Voltage: 220-240V
 Max. luminaires per circuit breaker: B10: 19, B16: 30, C10: 31, C16: 51

Light technic

Type of light source: LED
 Luminous flux: 840lm
 Efficacy: 105 lm/W
 Colour temperature: 3000K
 Colour rendering (Ra): Ra>80
 MacAdams factor: SDCM: 3
 Lifetime: L70/B20>100,000
 Lifetime: L80/B20>75,000
 Light distribution: Direct
 Beam angle: 118°

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class I
 IP Class: IP20

Energy and approvals

Contains light source of energy class: C
 Breeam: Fulfils Hea 01 for flicker free lighting
 BVB: Yes
 Sunda Hus: B

Materials and finish

Housing: Aluminium
 Colour: White (RAL 9003)
 Optics: Acrylic (PMMA)

Mounting/Connection



Mounting: Surface, Indoor
 Connection: Screwless terminal block

Dimensions

Width (mm) W: 270
 Height (mm) H: 314
 Depth (D): 88
 Weight (kg) gross/net: 2.4 / 2.02

Packaging

Packing dimensions (mm): 325 x 280 x 100

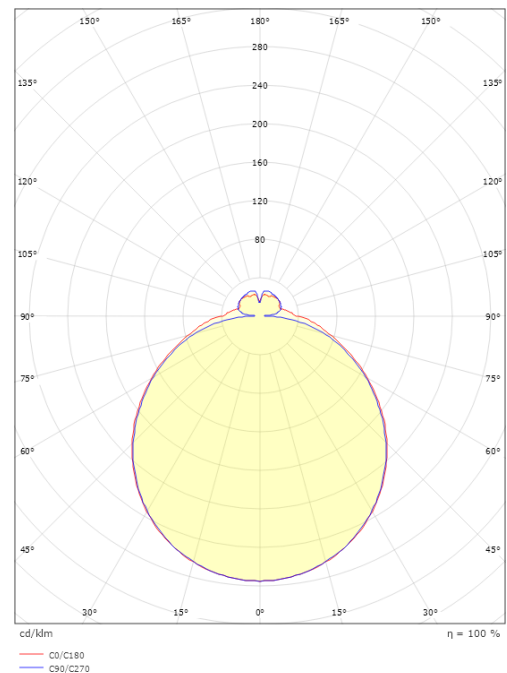

7 0 2 1 9 8 5 9 7 1 0 4 1