

Frame Round Maxi



Frame Round Maxi White 2380lm 4000K Ra>80 Trailing edge

Article code: 605171
EAN: 7021986051711



Electrical

System wattage: 19W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 31, B16: 50, C10: 52, C16: 85

Light technic

Type of light source: LED
Luminous flux: 2380lm
Efficacy: 125 lm/W
Colour temperature: 4000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L70/B20>100,000
Lifetime: L80/B20>75,000
Light distribution: Direct
Optic: Opal
Beam angle: 110°
Photobiological safety: RG 0

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class II
IK Class: IK10
IP Class: IP66
Fire protection class: 850°C - 30s

Energy and approvals

Contains light source of energy class: D
Breeam: Fulfils Hea 01 for flicker free lighting
BVB: Yes
ULOR (Yes, when ceiling mounted)
Sunda Hus: C-

Materials and finish

Housing: Aluminium
Colour: White (RAL 9003)
Optics: UV-stabilized polycarbonate

Mounting/Connection



Mounting: Surface, Indoor / Outdoor
Connection: Screwless terminal block

Dimensions

Height (mm) H: 77
Diameter (mm) D: 325
Weight (kg) gross/net: 3.1 / 2.7

Packaging

Packing dimensions (mm): 332 x 332 x 92

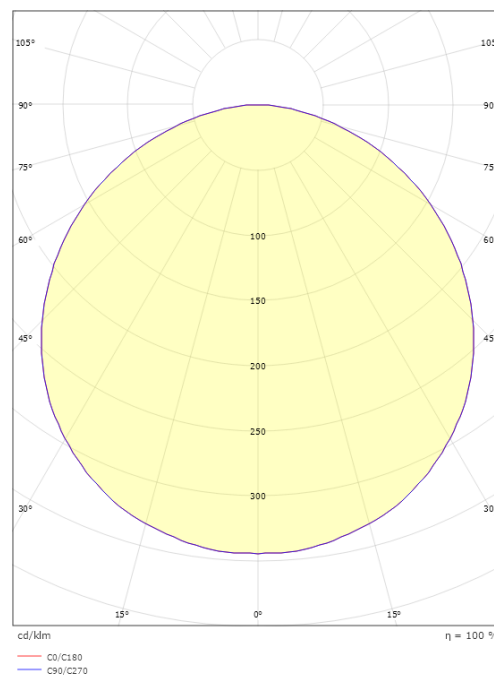

7 0 2 1 9 8 6 0 5 1 7 1 1