

Disc 480



Disc 480 480 White 3680lm 3000K Ra>80 Trailing edge

Article code: 606001
EAN: 7021986060010



Electrical

System wattage: 31W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 19, B16: 30, C10: 31, C16: 51

Light technic

Type of light source: LED
Luminous flux: 3680lm
Efficacy: 119 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B20>100,000
Lifetime: L90>50,000
Light distribution: Direct
Optic: Opalprism
Beam angle: 85°
UGR: UGR<22

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class II
IK Class: IK10
IP Class: IP20

Energy and approvals

Contains light source of energy class: D
Breeam: Fulfil Hea 01 for flicker free lighting
BVB: Yes
Sunda Hus: C+

Materials and finish

Housing: Aluminium
Colour: White
Optics: Acrylic (PMMA)

Mounting/Connection



Mounting: Surface, Indoor
Module: 480
Connection: Screwless terminal block

Dimensions

Height (mm) H: 55
Diameter (mm) D: 470
Weight (kg) gross/net: 4.845 / 4.433

Packaging

Packing dimensions (mm): 490 x 485 x 60

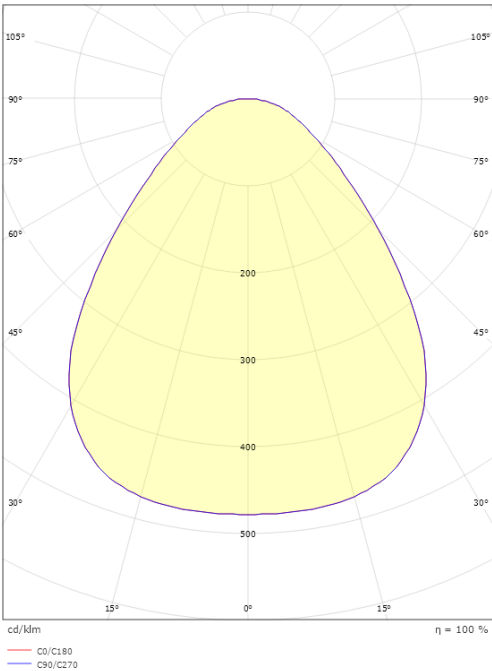

7 0 2 1 9 8 6 0 6 0 0 1 0