

# Disc 480



## Disc 480 480 White 3790lm 4000K Ra>80 Trailing edge

Article code: 606002  
EAN: 7021986060027



### Electrical

System wattage: 31W  
Voltage: 220-240V  
Max. luminaires per circuit breaker: B10: 19, B16: 30, C10: 31, C16: 51

### Light technic

Type of light source: LED  
Luminous flux: 3790lm  
Efficacy: 122 lm/W  
Colour temperature: 4000K  
Colour rendering (Ra): Ra>80  
MacAdams factor: SDCM: 3  
Lifetime: L80/B20>100,000  
Lifetime: L90>50,000  
Light distribution: Direct  
Optic: Opalprism  
Beam angle: 85°  
UGR: UGR<22

### Control/Dimming

Type: Trailing edge

### Protection

Luminaire class: Class II  
IK Class: IK10  
IP Class: IP20

### Energy and approvals

Contains light source of energy class: D  
Breeam: Fulfils Hea 01 for flicker free lighting  
BVB: Yes  
Sunda Hus: C+

### Materials and finish

Housing: Aluminium  
Colour: White  
Optics: Acrylic (PMMA)

### Mounting/Connection



Mounting: Surface, Indoor  
Module: 480  
Connection: Screwless terminal block

### Dimensions

Height (mm) H: 55  
Diameter (mm) D: 470  
Weight (kg) gross/net: 4.845 / 4.433

### Packaging

Packing dimensions (mm): 490 x 485 x 60

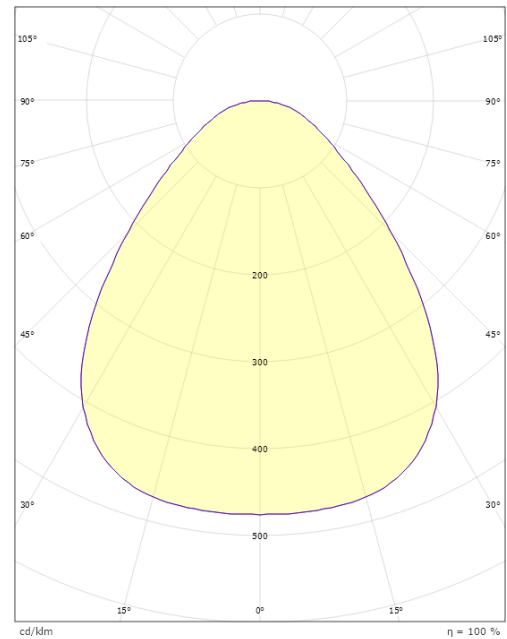

7 0 2 1 9 8 6 0 6 0 0 2 7