

Disc 290



Disc 290 White 2050lm 3000K Ra>80 Trailing edge

Article code: 606035
EAN: 7021986060355



Electrical

System wattage: 17W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 19, B16: 30, C10: 31, C16: 51

Light technic

Type of light source: LED
Luminous flux: 2050lm
Efficacy: 121 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B20>100,000
Lifetime: L90>50,000
Light distribution: Direct
Optic: Opalprism
Beam angle: 85°
UGR: UGR<25

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class II
IK Class: IK10
IP Class: IP20

Energy and approvals

Contains light source of energy class: D
Breeam: Fulfils Hea 01 for flicker free lighting
BVB: Yes
Sunda Hus: C+

Materials and finish

Housing: Aluminium
Colour: White
Optics: Acrylic (PMMA)

Mounting/Connection



Mounting: Surface, Indoor
Connection: Screwless terminal block

Dimensions

Height (mm) H: 55
Diameter (mm) D: 288
Weight (kg) gross/net: 2.005 / 1.846

Packaging

Packing dimensions (mm): 308 x 303 x 60

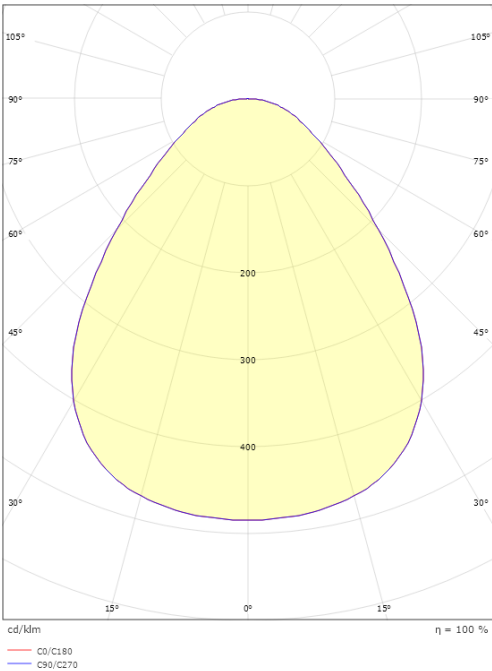

7 0 2 1 9 8 6 0 6 0 3 5 5