

Disc 760



Disc 760 White 7040lm 3000K Ra>80 DALI-2 / Push Dim

Article code: 606130
EAN: 7021986061307



Electrical

System wattage: 64W
Voltage: 220-240V
Frequency (Hz): 50/60Hz
Max. luminaires per circuit breaker: B10: 10, B16: 30, C10: 31, C16: 51

Light technic

Type of light source: LED
Luminous flux: 7040lm
Efficacy: 110 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B20>100,000
Lifetime: L90>50,000
Light distribution: Direct
Optic: Opalprism
Beam angle: 88°
UGR: UGR<19 up to 1200 mA/5280 lm
Visible flicker (PstLM): 0.02
Stroboscopic flicker (SVM): 0.01
Photobiological safety: RG 0

Control/Dimming

Type: DALI-2 / Push Dim

Protection

Luminaire class: Class II
IK Class: IK10
IP Class: IP20

Energy and approvals

Breem: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Steel
Colour: White
Optics: Acrylic (PMMA)

Mounting/Connection



Mounting: Surface, Indoor
Connection: Screwless terminal block

Dimensions

Height (mm) H: 55
Diameter (mm) D: 760
Weight (kg) gross/net: 11.1 / 10.7

Packaging

Packing dimensions (mm): 775 x 775 x 63

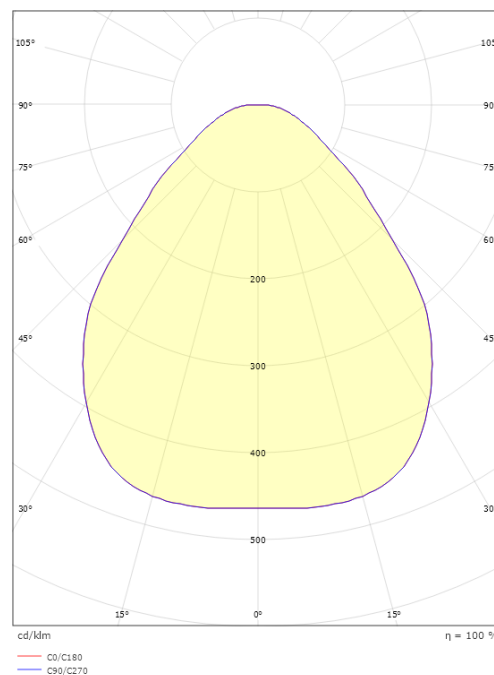

7 0 2 1 9 8 6 0 6 1 3 0 7