

Disc 760



Disc 760 White 7540lm 4000K Ra>80 DALI-2 / Push Dim

Article code:

606131

EAN:

7021986061314



Electrical

System wattage:	64W
Voltage:	220-240V
Frequency (Hz):	50/60Hz
Max. luminaires per circuit breaker:	B10: 10, B16: 30, C10: 31, C16: 51

Light technic

Type of light source:	LED
Luminous flux:	7540lm
Efficacy:	118 lm/W
Colour temperature:	4000K
Colour rendering (Ra):	Ra>80
MacAdams factor:	SDCM: 3
Lifetime:	L80/B20>100,000
Lifetime:	L90>50,000
Light distribution:	Direct
Optic:	Opalprism
Beam angle:	88°
UGR:	UGR<19 up to 1200 mA/5650 lm
Visible flicker (PstLM):	0.02
Stroboscopic flicker (SVM):	0.01
Photobiological safety:	RG 0

Control/Dimming

Type:	DALI-2 / Push Dim
-------	-------------------

Protection

Luminaire class:	Class II
IK Class:	IK10
IP Class:	IP20

Energy and approvals

Contains light source of energy class:	D
Breem:	Fulfil Hea 01 for flicker free lighting

Materials and finish

Housing:	Steel
Colour:	White
Optics:	Acrylic (PMMA)

Mounting/Connection



Mounting:	Surface, Indoor
Connection:	Screwless terminal block

Dimensions

Height (mm) H:	55
Diameter (mm) D:	760
Weight (kg) gross/net:	11.1 / 10.7

Packaging

Packing dimensions (mm):	775 x 775 x 63
--------------------------	----------------

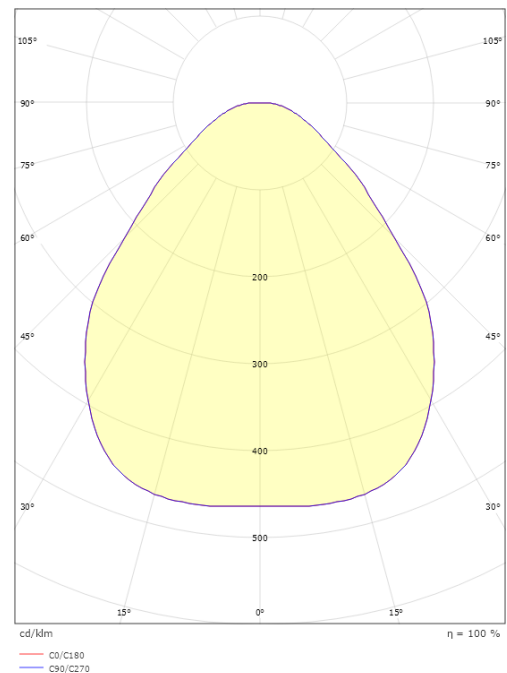

7 0 2 1 9 8 6 0 6 1 3 1 4