

Disc Connect



Disc 290 White 2110lm 4000K Ra>80 Connect

Article code: 606173
EAN: 7021986061734



Electrical

System wattage: 17W
Voltage: 220-240V
Frequency (Hz): 50/60Hz
Max. luminaires per circuit breaker: B10: 25, B16: 40, C10: 41, C16: 68

Light technic

Type of light source: LED
Light source included: Yes
Luminous flux: 2110lm
Efficacy: 124 lm/W
Colour temperature: 4000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B20>100,000
Lifetime: L90>50,000
Light distribution: Direct
Optic: Opalprism
Beam angle: 85°

Control/Dimming

Type: Connect

Protection

Luminaire class: Class II
IK Class: IK10
IP Class: IP20

Energy and approvals

Contains light source of energy class: C
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Colour: White
Optics: Acrylic (PMMA)

Mounting/Connection



Mounting: Surface, Indoor
Module: 290
Connection: Screwless terminal block

Dimensions


Height (mm) H: 55
Diameter (mm) D: 288
Weight (kg) gross/net: 2.005 / 1.846

Packaging

Packing dimensions (mm): 308 x 303 x 60

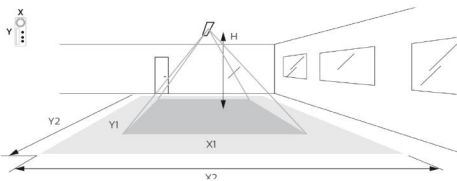

H (m)	Minor movements		Major movements	
	X1 (m)	Y1 (m)	X2 (m)	Y2 (m)
2.4	1.9	2.9	2.9	4.3
3	2.4	3.6	3.6	5.4

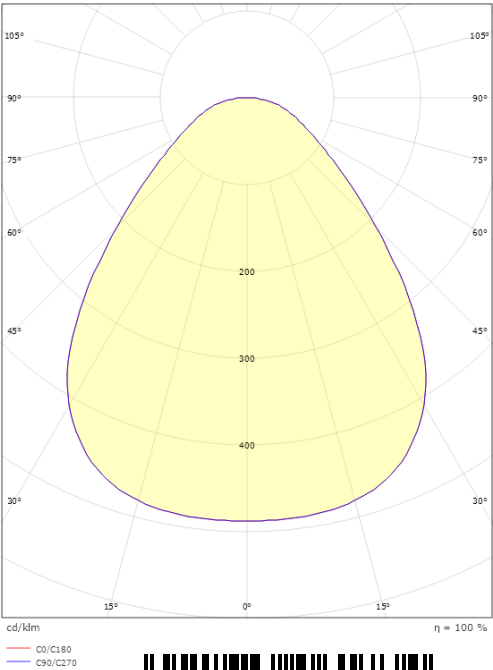

7 0 2 1 9 8 6 0 6 1 7 3 4