

# Disc 480 D/I



## Disc 480 White D/I 4160/4420lm 3000/4000K Ra>80 Trailing edge

Article code: 606180  
EAN: 7021986061802



### Electrical

Wattage: 34W/34W  
System wattage: 34W  
Voltage: 220-240V  
Max. luminaires per circuit breaker: B10: 19, B16: 30, C10: 31, C16: 51

### Light technic

Type of light source: LED  
Luminous flux: 4160/4420lm  
Efficacy: 122/130 lm/W  
Colour temperature: 3000/4000K  
Colour rendering (Ra): Ra>80  
MacAdams factor: SDCM: 3  
Lifetime: L80/B20>100,000  
Lifetime: L90>50,000  
Light distribution: Direct  
Optic: Opalprism  
Beam angle: 85°  
UGR: UGR<22  
Visible flicker (PstLM): 0,07  
Stroboscopic flicker (SVM): 0,05

### Control/Dimming

Type: Trailing edge

### Protection

Luminaire class: Class II  
IK Class: IK10  
IP Class: IP20

### Energy and approvals

Contains light source of energy class: E  
Breeam: Fulfils Hea 01 for flicker free lighting

### Materials and finish

Housing: Aluminium/plastic  
Colour: White  
Optics: Acrylic (PMMA)

### Mounting/Connection



Mounting: Surface, Indoor  
Connection: Screwless terminal block

### Dimensions

Height (mm) H: 62  
Diameter (mm) D: 467  
Weight (kg) gross/net: 3.6 / 3.188

### Packaging

Packing dimensions (mm): 490 x 485 x 70

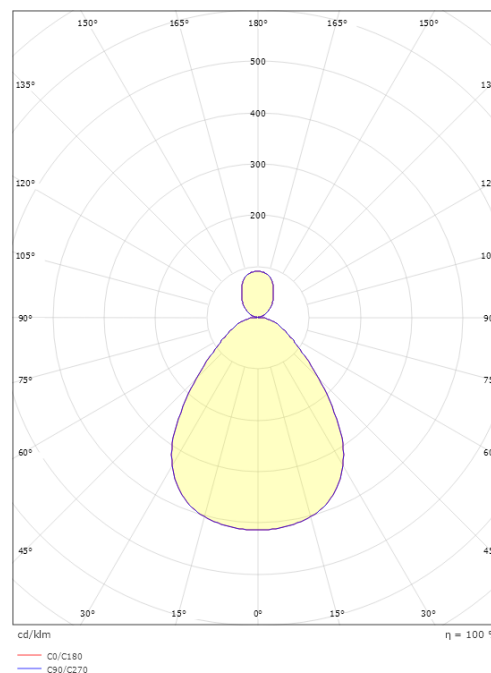

7 0 2 1 9 8 6 0 6 1 8 0 2