

Arena ECO 1500 Medium 11370lm 4000K Ra>80 DALI-2

Article code: 607019
EAN: 7021986070194



Electrical

Wattage: 76W
System wattage: 76W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 15, B16: 24, C10: 25, C16: 40
Leakage current (mA): 0.39

Light technic

Luminous flux: 11370lm
Efficacy: 150 lm/W
Colour temperature: 4000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B20>100,000
Lifetime: L90>50,000
Minimum ambient temperature: -25°C
Light distribution: Direct
Beam angle: 60°
UGR: UGR<25

Control/Dimming

Type: DALI-2

Protection

Luminaire class: Class I
IK Class: IK10
IP Class: IP23

Energy and approvals

Contains light source of energy class: C
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Steel
Optics: Acrylic (PMMA)

Mounting/Connection


Mounting: Surface, Indoor
Module: 1500
Connection: 7-pole screwless terminal block with 5x2,5mm2 (+DALI) through wiring

Dimensions

Length (mm) L: 1552
Width (mm) W: 134
Height (mm) H: 72
Weight (kg) gross/net: 4.1 / 3.8

Packaging

Packing dimensions (mm): 1596 x 76 x 148

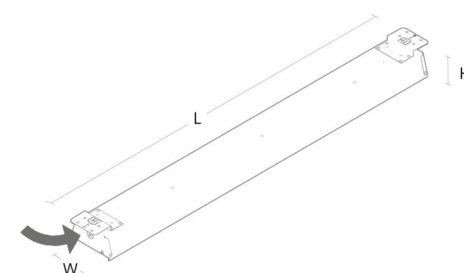

7 0 2 1 9 8 6 0 7 0 1 9 4