

## Edge White 595lm 2700K Ra>80 Trailing edge

Article code: 611350  
EAN: 7021986113501



### Electrical

System wattage: 10W  
Voltage: 220-240V  
Max. luminaires per circuit breaker: B10: 33, B16: 52, C10: 40, C16: 64

### Light technic

Type of light source: LED  
Luminous flux: 595lm  
Efficacy: 60 lm/W  
Colour temperature: 2700K  
Colour rendering (Ra): Ra>80  
MacAdams factor: SDCM: 3  
Lifetime: L70/B10>50,000  
Light distribution: Direct  
Optic: Glass Clear  
Beam angle: 110°/110°  
Photobiological safety: RG 0

### Control/Dimming

Type: Trailing edge

### Protection

Luminaire class: Class I  
IK Class: IK06  
IP Class: IP65

### Energy and approvals

Contains light source of energy class: C  
Breeam: Fulfils Hea 01 for flicker free lighting  
BVB: Yes  
Sunda Hus: C-

### Materials and finish

Housing: Aluminium  
Colour: Matte white (RAL 9003)  
Optics: Tempered glass

### Mounting/Connection



Mounting: Surface, Indoor / Outdoor  
Connection: Screwless terminal block

### Dimensions

Width (mm) W: 320  
Height (mm) H: 60  
Depth (D): 103  
Weight (kg) gross/net: 2.04 / 1.7

### Packaging

Packing dimensions (mm): 330 x 120 x 70

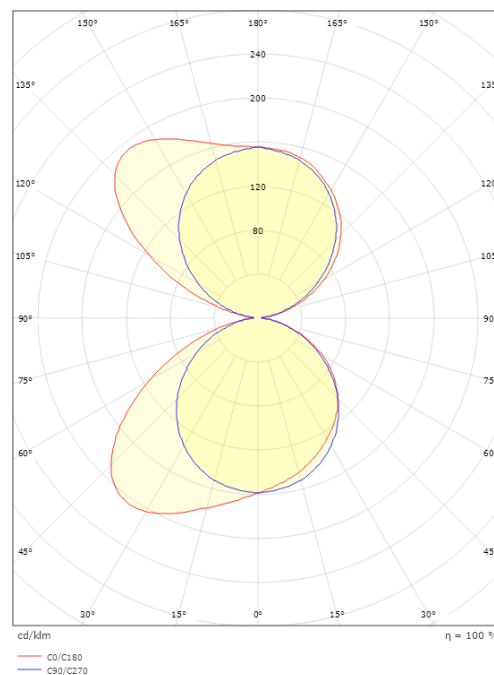

7 0 2 1 9 8 6 1 1 3 5 0 1