

Basso 2000 Black 1550lm 3000K Ra>80 Trailing edge

Article code: 614194
EAN: 7021986141948



Electrical

System wattage: 14W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 19, B16: 30, C10: 31, C16: 51

Light technic

Type of light source: LED
Luminous flux: 1550lm
Efficacy: 111 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L70/B50>100,000
Light distribution: Direct
Optic: Opal
Beam angle: 120°
Photobiological safety: RG 0

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class I
IK Class: IK10
IP Class: IP65
Fire protection class: 850°C - 30s

Energy and approvals

Contains light source of energy class: C
Breeam: Fulfil Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Colour: Black (RAL 9004)
Optics: UV-stabilized polycarbonate

Mounting/Connection



Mounting: Surface, Indoor / Outdoor
Module: 2000
Connection: Screwless terminal block

Dimensions

Length (mm) L: 308
Width (mm) W: 308
Height (mm) H: 88
Weight (kg) gross/net: 1.9 / 1.9

Packaging

Packing dimensions (mm): 308 x 308 x 88

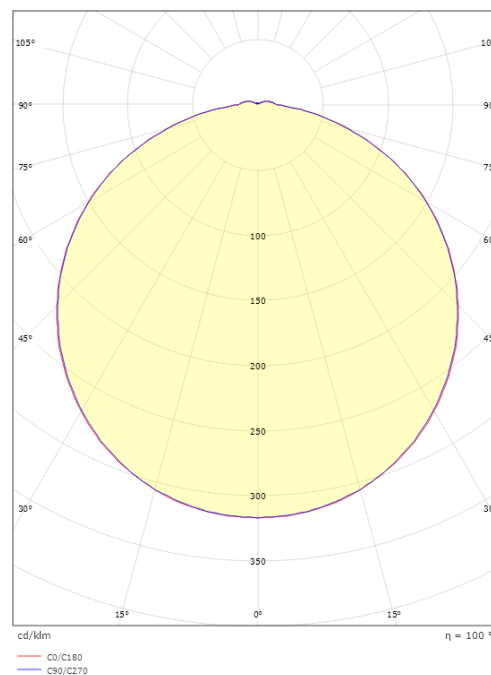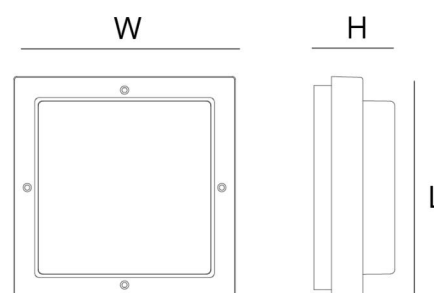

7 0 2 1 9 8 6 1 4 1 9 4 8