

Metro 2x6,2W White 660lm 3000K Ra>80 Trailing edge

Article code: 621698
EAN: 7021986216981



Electrical

Wattage: 2x6,2W
System wattage: 12.4W
Voltage: 220-240V

Light technic

Type of light source: LED
Socket: GU10
Light source included: Yes
Luminous flux: 660lm
Efficacy: 53 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 4
Lifetime: L70/B50>25,000
Light distribution: Direct
Optic: Glass Clear
Beam angle: 35°/35°

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class II
IK Class: IK07
IP Class: IP65

Energy and approvals

Contains light source of energy class: F
Bream: Fulfil Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Colour: White (RAL 9003)
Optics: Tempered glass

Mounting/Connection



Mounting: Surface, Indoor / Outdoor
Module: 2x6,2W
Connection: Screwless terminal block

Dimensions

Width (mm) W: 90
Height (mm) H: 215
Depth (D): 147
Weight (kg) gross/net: 1.476 / 1.33

Packaging

Packing dimensions (mm): 160 x 100 x 230

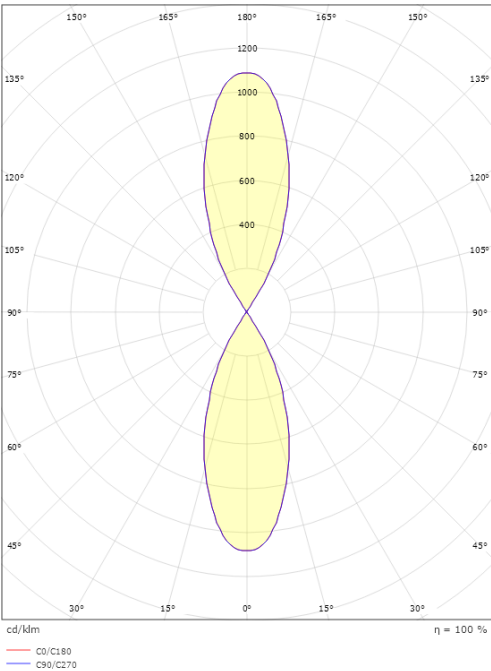

7 0 2 1 9 8 6 2 1 6 9 8 1