

Fevik 1000/2000 + 1500/2500



Fevik White 1000/2000 3000K Ra>80 Trailing edge

Article code: 623257
EAN: 7021986232578
Replaces: 611233, 611231



Electrical

Wattage: 8W/17W
Voltage: 220-240V
Frequency (Hz): 50/60Hz
Max. luminaires per circuit breaker: B10: 50, B16: 80, C10: 50, C16: 80

Light technic

Type of light source: LED
Luminous flux: 790/1630lm
Efficacy: 99/96lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B20>50,000
Light distribution: Direct
Optic: Reflector
Beam angle: 100°

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class II
IK Class: IK10
IP Class: IP65

Energy and approvals

Contains light source of energy class: E
Breeam: Fulfils Hea 01 for flicker free lighting
BVB: Yes
ULOR (: Yes

Materials and finish

Housing: Aluminium
Colour: White (RAL 9003)
Optics: Tempered glass

Mounting/Connection



Mounting: Surface, Outdoor
Connection: Screwless terminal block

Dimensions

Width (mm) W: 223
Height (mm) H: 110
Depth (D): 276
Weight (kg) gross/net: 3.5 / 3.3

Packaging

Packing dimensions (mm): 300 x 233 x 120

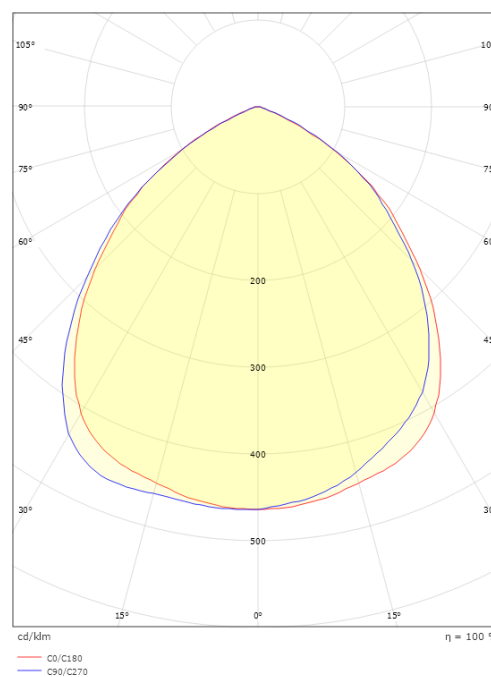

7 0 2 1 9 8 6 2 3 2 5 7 8