

Curve Graphite 530lm 4000K Ra>80 Trailing edge

Article code: 623342
 EAN: 7021986233421


Electrical

System wattage: 7W
 Voltage: 220-240V
 Max. luminaires per circuit breaker: B10: 33, B16: 52, C10: 40, C16: 64

Light technic

Type of light source: LED
 Luminous flux: 530lm
 Efficacy: 76 lm/W
 Colour temperature: 4000K
 Colour rendering (Ra): Ra>80
 MacAdams factor: SDCM: 3
 Lifetime: L90/B10>50,000
 Lifetime: L80/B10>100,000
 Light distribution: Direct
 Optic: Glass Clear
 Beam angle: 110°
 Photobiological safety: RG 0

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class I
 IK Class: IK06
 IP Class: IP65

Energy and approvals

Contains light source of energy class: D
 Breeam: Fulfils Hea 01 for flicker free lighting
 BVB: Yes
 Sunda Hus: C-

Materials and finish

Housing: Aluminium
 Colour: Graphite
 Optics: Tempered glass

Mounting/Connection



Mounting: Surface, Indoor / Outdoor
 Connection: Screwless terminal block

Dimensions

Width (mm) W: 320
 Height (mm) H: 60
 Depth (D): 103
 Weight (kg) gross/net: 1.68 / 1.4

Packaging

Packing dimensions (mm): 330 x 120 x 70

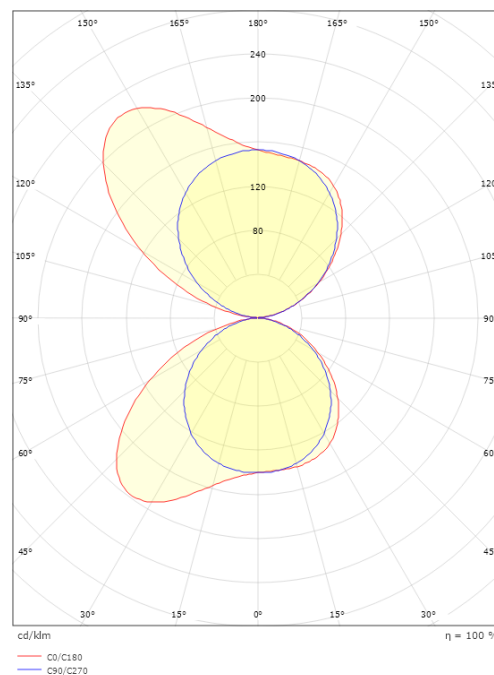

7 0 2 1 9 8 6 2 3 3 4 2 1