

Trio Socket



Trio Socket Graphite w/ 2 x outlet 450lm 3000K Ra>80 Trailing edge

Article code: 623525
EAN: 7021986235258



Electrical

System wattage: 10W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 33, B16: 52, C10: 40, C16: 64

Light technic

Type of light source: LED
Luminous flux: 450lm
Efficacy: 45 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L70/B10>50,000
Light distribution: Direct
Optic: Opal
Beam angle: 120°

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class I
IK Class: IK10
IP Class: IP44

Energy and approvals

Contains light source of energy class: C
Breeam: Fulfils Hea 01 for flicker free lighting
BVB: Yes
Sunda Hus: C+

Materials and finish

Housing: Aluminium
Colour: Graphite
Optics: UV-stabilized polycarbonate

Mounting/Connection



Mounting: Surface, Indoor / Outdoor
Connection: Screwless terminal block

Dimensions

Length (mm) L: 320
Width (mm) W: 180
Height (mm) H: 320
Depth (D): 102
Weight (kg) gross/net: 1.9 / 1.625

Packaging

Packing dimensions (mm): 330 x 190 x 110

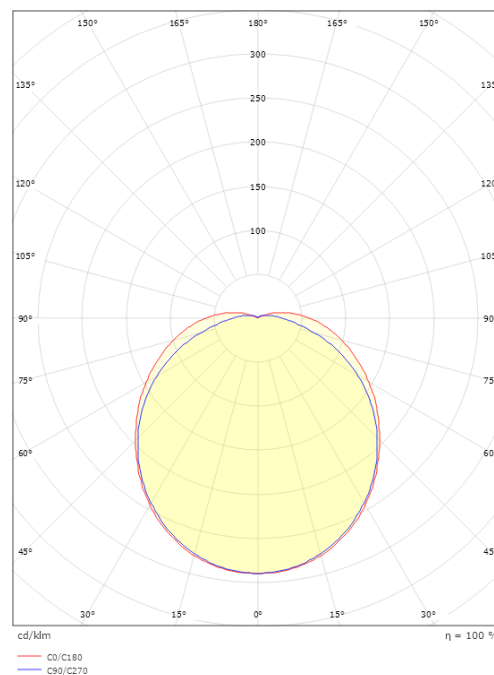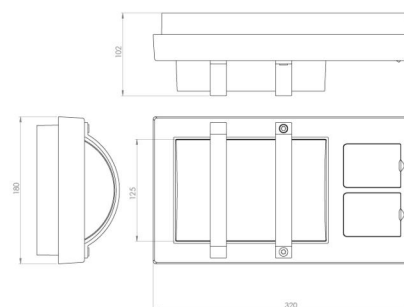

7 0 2 1 9 8 6 2 3 5 2 5 8