

Metro Deco



Metro Deco Graphite 190lm 2700K Ra>80 Trailing edge

Article code: 623700
EAN: 7021986237009



Electrical

System wattage: 4.5W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 200, B16: 200, C10: 320, C16: 320

Light technic

Type of light source: LED
Socket: GU10
Light source included: Yes
Luminous flux: 190lm
Efficacy: 42 lm/W
Colour temperature: 2700K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 4
Lifetime: L70/B50>40,000
Light distribution: Direct
Optic: Plastic clear
Beam angle: 35°

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class II
IK Class: IK08
IP Class: IP65

Energy and approvals

Contains light source of energy class: G
Breeam: Fulfils Hea 01 for flicker free lighting
BVB: Yes
ULOR (: Yes
Sunda Hus: C+

Materials and finish

Housing: Aluminium
Colour: Graphite
Optics: UV-stabilized polycarbonate

Mounting/Connection



Mounting: Surface, Indoor / Outdoor
Connection: Screwless terminal block

Dimensions

Width (mm) W: 90
Height (mm) H: 125
Depth (D): 147
Weight (kg) gross/net: 1.08 / 0.9

Packaging

Packing dimensions (mm): 125 x 900 x 125

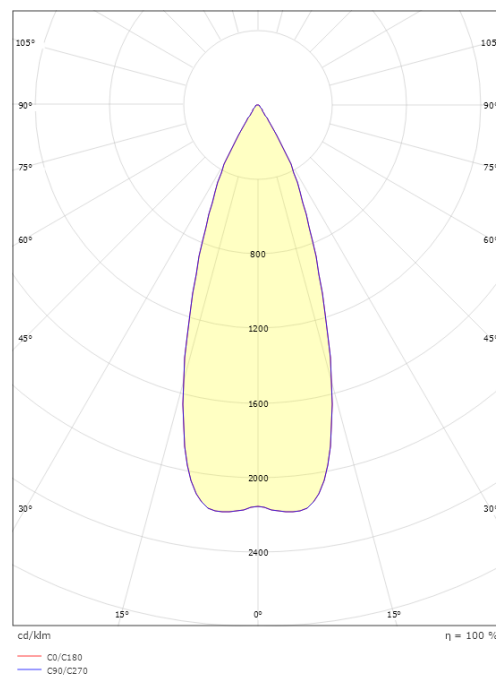

7 0 2 1 9 8 6 2 3 7 0 0 9