

Opus Graphite 580lm 3000K Ra>80 Trailing edge

Article code: 623736
 EAN: 7021986237368

**Electrical**

Wattage: 10W
 System wattage: 10W
 Voltage: 220-240V

Light technic

Type of light source: LED
 Luminous flux: 580lm
 Efficacy: 58 lm/W
 Colour temperature: 3000K
 Colour rendering (Ra): Ra>80
 MacAdams factor: SDCM: 3
 Lifetime: L70/B50>50,000
 Light distribution: Direct
 Optic: Opal
 Beam angle: 360°
 Photobiological safety: RG 0

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class II
 IK Class: IK10
 IP Class: IP65

Energy and approvals

Contains light source of energy class: C
 Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
 Colour: Graphite
 Optics: UV-stabilized polycarbonate

Mounting/Connection



Mounting: Onto surfaces or ground anchor, Outdoor
 Connection: Screwless terminal block

Dimensions

Height (mm) H: 970
 Diameter (mm) D: 216
 Weight (kg) gross/net: 6.36 / 5.12

Packaging

Packing dimensions (mm): 230 x 230 x 990

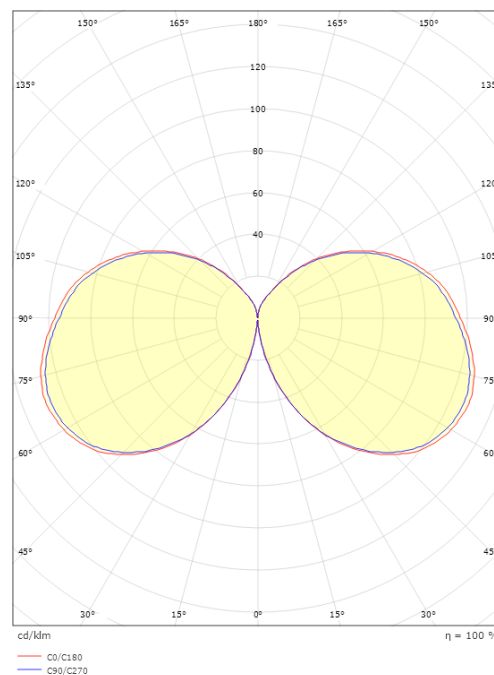

7 0 2 1 9 8 6 2 3 7 3 6 8