

Kjevik Black 2060lm 3000K Ra>80 On/Off

Article code: 623800
EAN: 7021986238006



Electrical

System wattage: 26W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 31, B16: 50, C10: 52, C16: 85

Light technic

Type of light source: LED
Luminous flux: 2060lm
Efficacy: 79 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 2
Lifetime: L90/B10>100,000
Light distribution: Direct
Visible flicker (PstLM): 0.03
Stroboscopic flicker (SVM): 0.02
Photobiological safety: RG 1

Control/Dimming

Type: On/Off

Protection

Luminaire class: Class II
IK Class: IK10
IP Class: IP66
Surge protection: Integrated (min. 4 kV)

Energy and approvals

Contains light source of energy class: D
Breeam: Fulfils Hea 01 for flicker free lighting
ULOR (Yes

Materials and finish

Housing: Aluminium
Optics: UV-stabilized polycarbonate

Mounting/Connection



Mounting: Outdoor

Dimensions

Height (mm) H: 1010
Diameter (mm) D: 200
Weight (kg) gross/net: 10.75 / 8.7

Packaging

Packing dimensions (mm): 1030 x 215 x 215

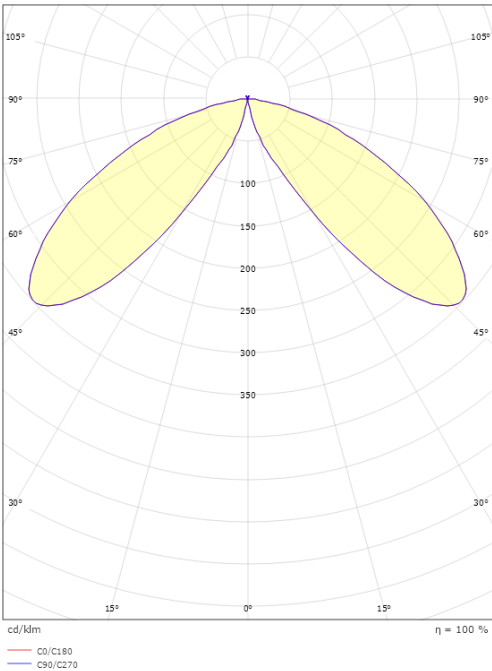

7 0 2 1 9 8 6 2 3 8 0 0 6