

Spike Graphite Uplight 890lm 2700K Ra>80 Trailing edge

Article code: 623933
EAN: 7021986239331



Electrical

Wattage: 10W+6W
System wattage: 16W
Voltage: 220-240V

Light technic

Type of light source: LED
Socket: GU10
Light source included: Yes
Luminous flux: 890lm
Efficacy: 56 lm/W
Colour temperature: 2700K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L70/B50>50,000
Light distribution: Direct
Optic: Plastic opal/transparent
Beam angle: 95° down / 15° up

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class I
IK Class: IK08
IP Class: IP44

Energy and approvals

Contains light source of energy class: F/G
Breeam: Fulfils Hea 01 for flicker free lighting
BVB: Yes

Materials and finish

Housing: Aluminium
Colour: Graphite
Optics: UV-stabilized polycarbonate/ UV-stabilized PMMA

Mounting/Connection



Mounting: Surface, Outdoor
Connection: Screwless terminal block

Dimensions

Length (mm) L: 180
Width (mm) W: 171
Height (mm) H: 173
Depth (D): 155
Weight (kg) gross/net: 1.86 / 1.624

Packaging

Packing dimensions (mm): 180 x 165 x 185

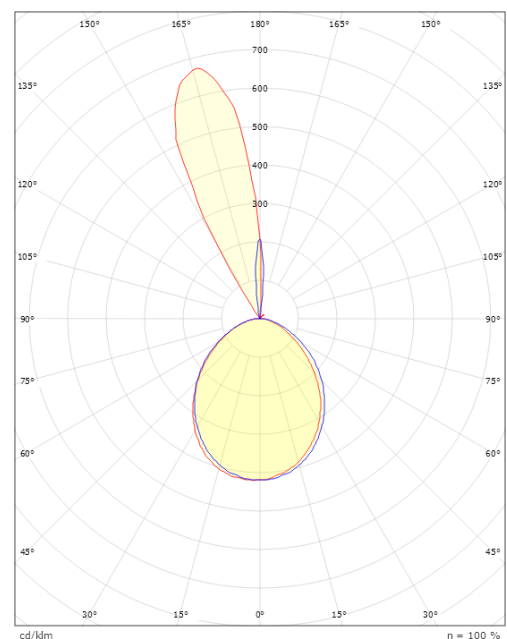

cd/klm $\eta = 100\%$
— C0/C180
— C90/C270



7 0 2 1 9 8 6 2 3 9 3 3 1