

Herning Bollard & Pole



Herning Midi Ø60 Grey Polehead 1060/1140/1770/1920lm 3000/4000K Ra>80 Trailing edge

Article code: 623981
EAN: 7021986239812



Electrical

Wattage: 13W/25W
Voltage: 220-240V
Frequency (Hz): 50/60Hz
Max. luminaires per circuit breaker: B10: 23, B16: 36, C10: 37, C16: 60

Light technic

Type of light source: LED
Luminous flux: 1060/1140/1770/1920lm
Efficacy: 82/88/71/77lm/W
Colour temperature: 3000/4000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B20>50,000
Light distribution: Direct
Optic: Glass
UGR: UGR<25
Photobiological safety: RG 1

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class II
IK Class: IK06
IP Class: IP65

Energy and approvals

Contains light source of energy class: E
ULOR (Yes

Materials and finish

Housing: Aluminium

Mounting/Connection



Mounting: Pole, wall, bollard or earthing rod, Outdoor
Module: Ø60
Cable: Cable 2x1mm² 3m

Dimensions

Length (mm) L: 400
Width (mm) W: 240
Height (mm) H: 189
Weight (kg) gross/net: 3.64 / 2.915

Packaging

Packing dimensions (mm): 412 x 250 x 240

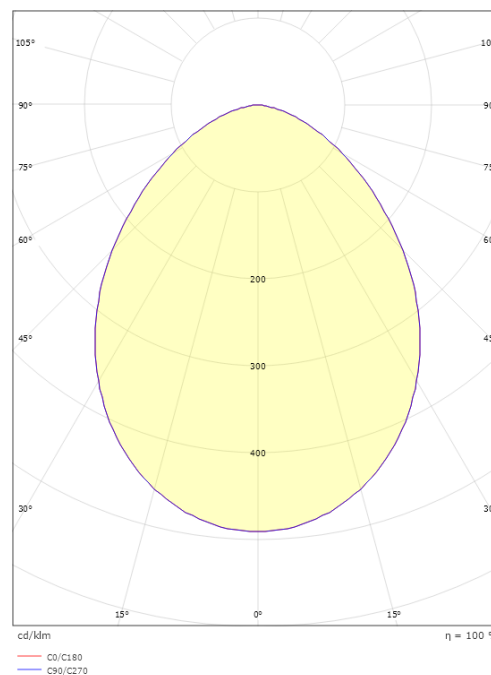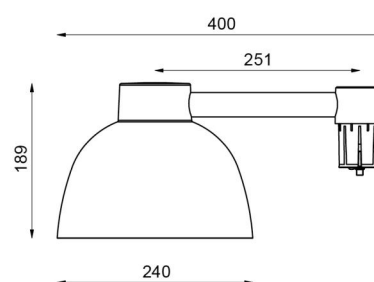

7 0 2 1 9 8 6 2 3 9 8 1 2