

SG Hovden Graphite Mini 540lm 3000K Ra>80 Trailing edge

Article code: 630000
EAN: 7021986300000



Electrical

System wattage: 8W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 69, B16: 98, C10: 69, C16: 98

Light technic

Type of light source: LED
Luminous flux: 540lm
Efficacy: 68 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L70/B10>100,000
Light distribution: Direct
Optic: Lens
Beam angle: 15°
Visible flicker (PstLM): 0
Stroboscopic flicker (SVM): 0

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class I
IK Class: IK10
IP Class: IP67

Energy and approvals

Contains light source of energy class: F
Breeam: Fulfils Hea 01 for flicker free lighting
BVB: Yes
ULOR (: Yes, up to 49° tilt angle

Materials and finish

Housing: Aluminium
Colour: Graphite
Optics: Acrylic (PMMA)

Mounting/Connection



Mounting: Surface, Outdoor
Cable: Cable 2m
Connection: Includes cable and plug

Dimensions

Length (mm) L: 95
Width (mm) W: 46
Height (mm) H: 100
Weight (kg) gross/net: 0.66 / 0.6

Packaging

Packing dimensions (mm): 150 x 125 x 65

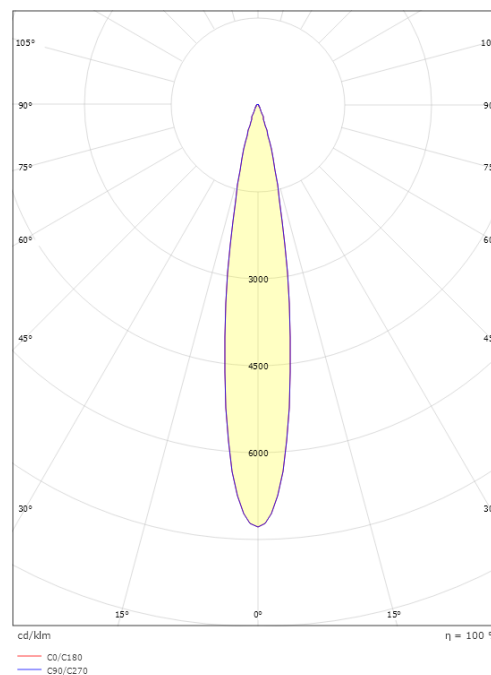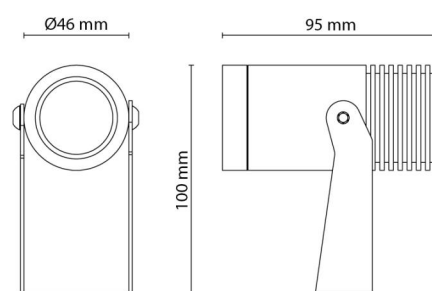

7 0 2 1 9 8 6 3 0 0 0 0 0