

SG Hovden Graphite Maxi 2070lm 4000K Ra>80 Trailing edge

Article code: 630010
EAN: 7021986300109



Electrical

System wattage: 23W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 24, B16: 33, C10: 24, C16: 33

Light technic

Type of light source: LED
Luminous flux: 2070lm
Efficacy: 90 lm/W
Colour temperature: 4000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L70/B10>100,000
Light distribution: Direct
Optic: Lens
Beam angle: 15°
Visible flicker (PstLM): 0.1
Stroboscopic flicker (SVM): 0

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class I
IK Class: IK10
IP Class: IP67

Energy and approvals

Contains light source of energy class: F
Breeam: Fulfils Hea 01 for flicker free lighting
ULOR (Yes, up to 30° tilt angle

Materials and finish

Housing: Aluminium
Colour: Graphite
Optics: Acrylic (PMMA)

Mounting/Connection



Mounting: Surface, Outdoor
Cable: Cable 2m
Connection: Includes cable and plug

Dimensions

Length (mm) L: 150
Width (mm) W: 89
Height (mm) H: 147
Weight (kg) gross/net: 2.05 / 1.863

Packaging

Packing dimensions (mm): 200 x 140 x 110

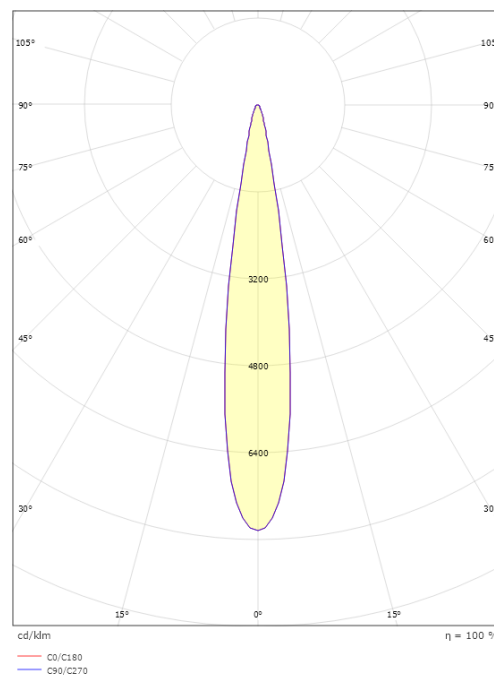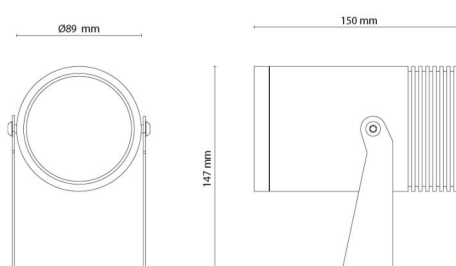

7 0 2 1 9 8 6 3 0 0 1 0 9