

Sidewalk



Sidewalk 2000 Graphite 1300lm 3000K Ra>80 Sensor

Article code: 633839
EAN: 7021986338393



Electrical

System wattage: 14W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 19, B16: 30, C10: 31, C16: 51

Light technic

Type of light source: LED
Luminous flux: 1300lm
Efficacy: 93 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L70/B50>100,000
Light distribution: Direct
Optic: Opal
Beam angle: 110°

Control/Dimming

Type: Sensor

Protection

Luminaire class: Class I
IK Class: IK10
IP Class: IP65
Fire protection class: 850°C - 30s

Energy and approvals

Contains light source of energy class: C

Materials and finish

Housing: Aluminium
Colour: Graphite
Optics: UV-stabilized polycarbonate

Mounting/Connection


Mounting: Surface, Indoor / Outdoor
Module: 2000
Connection: Screwless terminal block

Dimensions


Length (mm) L: 300
Width (mm) W: 300
Height (mm) H: 87
Weight (kg) gross/net: 3 / 2.28

Packaging

Packing dimensions (mm): 310 x 310 x 100



Sensor settings									
	1	1	2	3	4	100%			
	2	●	●	●	-	75%			
	3	●	●	●	-	50%			
	4	●	●	●	-	25%			
	5	●	●	●	-	10%			
	1	1	2	3	4	5s			
	2	●	●	●	●	30s			
	3	●	●	●	●	1 min			
	4	●	●	●	●	5 min			
	5	●	●	●	●	15 min			
	6	●	●	●	●	30 min			
	1	1	2	3	4	2 Lux			
	2	●	●	●	●	5 Lux			
	3	●	●	●	●	10 Lux			
	4	●	●	●	●	30 Lux			
	5	●	●	●	●	50 Lux			
	6	●	●	●	●	Off			

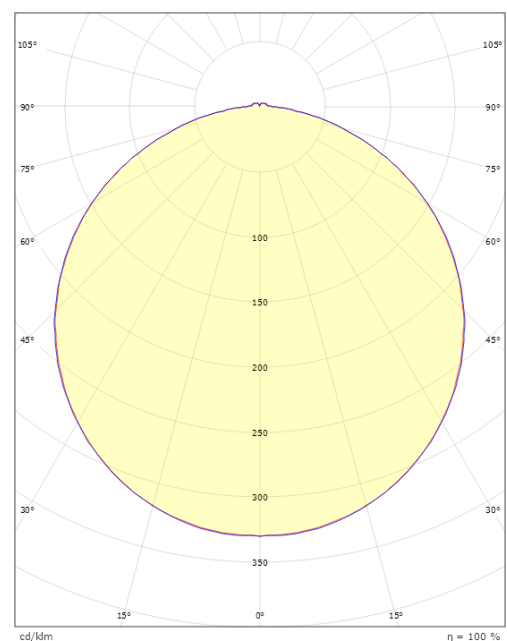

cd/km
C0/C180
C90/C270



7 0 2 1 9 8 6 3 3 8 3 9 3