

**Solo 1100 White 640lm 3000K Ra>80 Sensor**

Article code: 641551  
 EAN: 7021986415513


**Electrical**

System wattage: 10W  
 Voltage: 220-240V  
 Max. luminaires per circuit breaker: B10: 33, B16: 52, C10: 40, C16: 64

**Light technic**

Type of light source: LED  
 Luminous flux: 640lm  
 Efficacy: 64 lm/W  
 Colour temperature: 3000K  
 Colour rendering (Ra): Ra>80  
 MacAdams factor: SDCM: 3  
 Lifetime: L70/B10>50,000  
 Light distribution: Direct  
 Optic: Opal  
 Beam angle: 120°

**Control/Dimming**

Type: Sensor

**Protection**

Luminaire class: Class II  
 IK Class: IK10  
 IP Class: IP65  
 Fire protection class: 850°C - 30s

**Energy and approvals**

Contains light source of energy class: C  
 Breeam: Fulfils Hea 01 for flicker free lighting

**Materials and finish**

Housing: Aluminium  
 Colour: White (RAL 9003)  
 Optics: UV-stabilized polycarbonate

**Mounting/Connection**



Mounting: Surface, Indoor / Outdoor  
 Module: 1100  
 Connection: Screwless terminal block

**Dimensions**

Height (mm) H: 130  
 Diameter (mm) D: 270  
 Depth (D): 130  
 Weight (kg) gross/net: 2.169 / 1.85

**Packaging**

Packing dimensions (mm): 270 x 270 x 130

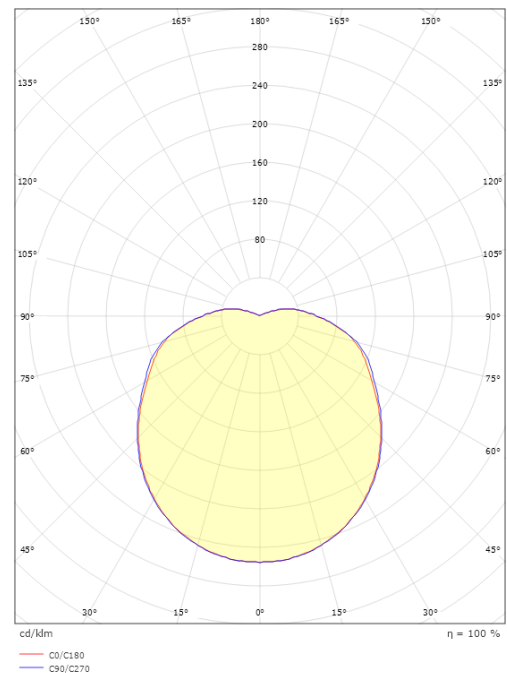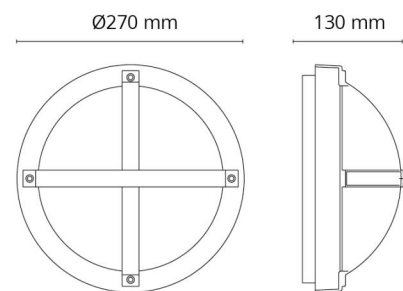

7 0 2 1 9 8 6 4 1 5 5 1 3