

Artes White 500lm 4000K Ra>80 Trailing edge

Article code: 641702
EAN: 7021986417029



Electrical

System wattage: 8W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 90, B16: 150, C10: 90, C16: 150

Light technic

Type of light source: LED
Luminous flux: 500lm
Efficacy: 63 lm/W
Colour temperature: 4000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B20>60,000
Optic: Lens
Visible flicker (PstLM): 0.07
Stroboscopic flicker (SVM): 0.32
Photobiological safety: RG 1

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class II
IK Class: IK10
IP Class: IP65

Energy and approvals

Contains light source of energy class: E
Breeam: Fulfils Hea 01 for flicker free lighting
BVB: Yes
ULOR (Yes, for direct only
Sunda Hus: C+

Materials and finish

Housing: Aluminium
Colour: White (RAL 9003)
Optics: UV-stabilized polycarbonate

Mounting/Connection



Mounting: Surface, Indoor / Outdoor
Connection: Screwless terminal block

Dimensions

Length (mm) L: 120
Width (mm) W: 110
Height (mm) H: 120
Weight (kg) gross/net: 0.98 / 0.795

Packaging

Packing dimensions (mm): 125 x 125 x 130

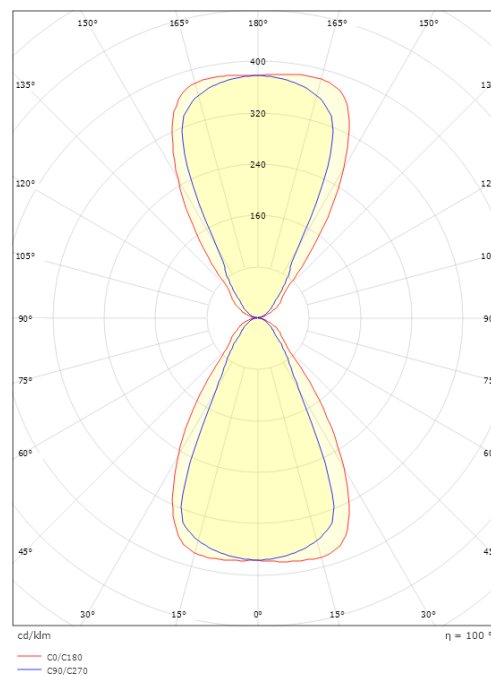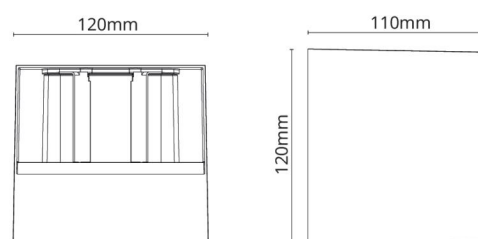

7 0 2 1 9 8 6 4 1 7 0 2 9