

Langfoss Graphite 14810lm 4000K Ra>70 On/Off

Article code: 641936
 EAN: 7021986419368
 Replaces: 641903



Electrical

System wattage: 95W
 Voltage: 220-240V
 Max. luminaires per circuit breaker: B10: 5, B16: 8, C10: 8, C16: 13

Light technic

Type of light source: LED
 Light source included: Yes
 Luminous flux: 14810lm
 Efficacy: 156 lm/W
 Colour temperature: 4000K
 Colour rendering (Ra): Ra>70
 MacAdams factor: SDCM: 3
 Lifetime: L90/B10>50,000
 Light distribution: Asymmetric
 Optic: Lens

Control/Dimming

Type: On/Off

Protection

Luminaire class: Class I
 IK Class: IK08
 IP Class: IP66
 Surge protection: Integrated (min. 4 kV)

Energy and approvals

ULOR (Yes, up to 21° tilt angle

Materials and finish

Housing: Die-cast aluminium
 Colour: Graphite
 Optics: Tempered glass

Mounting/Connection



Mounting: Indoor / Outdoor
 Cable: Cable 3x1mm² 2m, H07RN-F
 Wind projected area: 0,1245m² - Max 16,2 kg

Dimensions

Length (mm) L: 478
 Width (mm) W: 314
 Height (mm) H: 85
 Weight (kg) gross/net: 9.25 / 8.7

Packaging

Packing dimensions (mm): 508 x 325 x 93

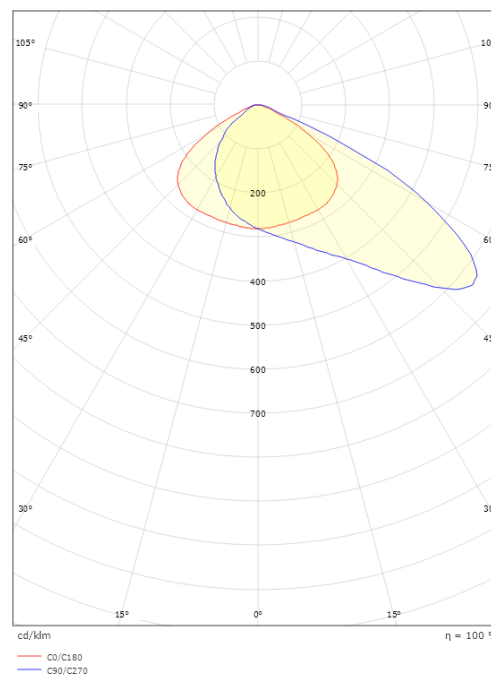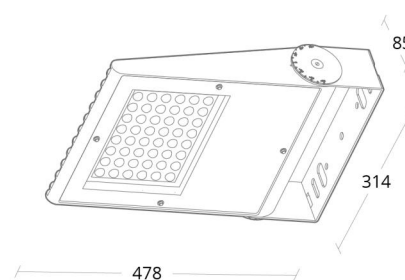

7 0 2 1 9 8 6 4 1 9 3 6 8