

Langfoss Mini



Langfoss Mini Graphite 8640lm 3000K Ra>70 On/Off

Article code: 641939
 EAN: 7021986419399
 Replaces: 641913



Electrical

System wattage: 68W
 Voltage: 220-240V
 Max. luminaires per circuit breaker: B10: 8, B16: 12, C10: 12, C16: 20

Light technic

Type of light source: LED
 Light source included: Yes
 Luminous flux: 8640lm
 Efficacy: 127 lm/W
 Colour temperature: 3000K
 Colour rendering (Ra): Ra>70
 MacAdams factor: SDCM: 3
 Lifetime: L80/B50>100,000
 Lifetime: L94>50,000
 Minimum ambient temperature: -40°C
 Light distribution: Asymmetric
 Optic: Lens

Control/Dimming

Type: On/Off

Protection

Luminaire class: Class I
 IK Class: IK07
 IP Class: IP66
 Surge protection: Integrated (min. 4 kV)

Energy and approvals

ULOR (Yes, up to 22° tilt angle

Materials and finish

Housing: Die-cast aluminium
 Colour: Graphite
 Optics: Tempered glass

Mounting/Connection



Mounting: Indoor / Outdoor
 Cable: Cable 3x1mm² 2m, H07RN-F
 Wind projected area: 0,0756m² - Max 10,2 kg

Dimensions

Length (mm) L: 362
 Width (mm) W: 265
 Height (mm) H: 85
 Weight (kg) gross/net: 6.3 / 5.7

Packaging

Packing dimensions (mm): 395 x 280 x 100

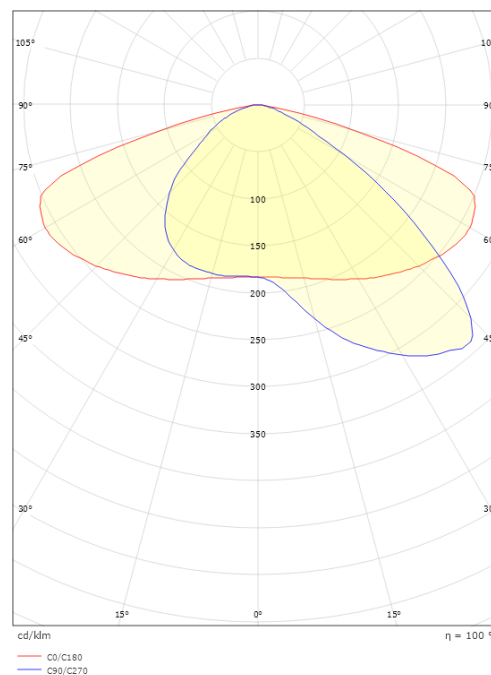

7 0 2 1 9 8 6 4 1 9 3 9 9