

Langfoss Mini



Langfoss Mini Graphite 5240lm 4000K Ra>70 On/Off

Article code: 641940
EAN: 7021986419405
Replaces: 641914



Electrical

System wattage: 35W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 8, B16: 12, C10: 12, C16: 20

Light technic

Type of light source: LED
Light source included: Yes
Luminous flux: 5240lm
Efficacy: 150 lm/W
Colour temperature: 4000K
Colour rendering (Ra): Ra>70
MacAdams factor: SDCM: 3
Lifetime: L80/B50>100,000
Lifetime: L94>50,000
Minimum ambient temperature: -40°C
Light distribution: Asymmetric
Optic: Lens

Control/Dimming

Type: On/Off

Protection

Luminaire class: Class I
IK Class: IK07
IP Class: IP66
Surge protection: Integrated (min. 4 kV)

Energy and approvals

ULOR (Yes, up to 22° tilt angle

Materials and finish

Housing: Die-cast aluminium
Colour: Graphite
Optics: Tempered glass

Mounting/Connection



Mounting: Indoor / Outdoor
Cable: Cable 3x1mm² 2m, H07RN-F
Wind projected area: 0,0756m² - Max 10,2 kg

Dimensions

Length (mm) L: 362
Width (mm) W: 265
Height (mm) H: 85
Weight (kg) gross/net: 6.55 / 5.7

Packaging

Packing dimensions (mm): 395 x 280 x 100

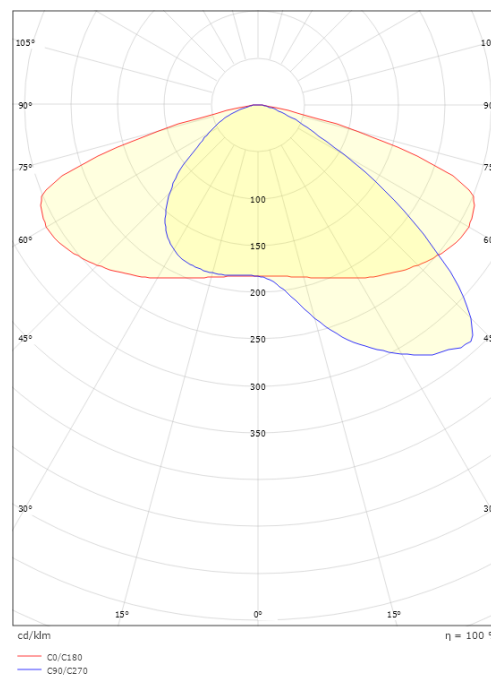

7 0 2 1 9 8 6 4 1 9 4 0 5