

Solo 1100 Graphite 570lm 3000K Ra>80 Sensor

Article code: 643551
 EAN: 7021986435511

• = This article is produced by order, with an expected delivery time of 3-4 weeks.

**Electrical**

System wattage: 10W
 Voltage: 220-240V
 Max. luminaires per circuit breaker: B10: 33, B16: 52, C10: 40, C16: 64

Light technic

Type of light source: LED
 Luminous flux: 570lm
 Efficacy: 57 lm/W
 Colour temperature: 3000K
 Colour rendering (Ra): Ra>80
 MacAdams factor: SDCM: 3
 Lifetime: L70/B10>50,000
 Light distribution: Direct
 Optic: Opal
 Beam angle: 120°

Control/Dimming

Type: Sensor

Protection

Luminaire class: Class II
 IK Class: IK10
 IP Class: IP65
 Fire protection class: 850°C - 30s

Energy and approvals

Contains light source of energy class: C
 Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
 Colour: Graphite
 Optics: UV-stabilized polycarbonate

Mounting/Connection



Mounting: Surface, Indoor / Outdoor
 Module: 1100
 Connection: Screwless terminal block

Dimensions

Height (mm) H: 130
 Diameter (mm) D: 270
 Depth (D): 130
 Weight (kg) gross/net: 2.169 / 1.85

Packaging

Packing dimensions (mm): 270 x 270 x 130

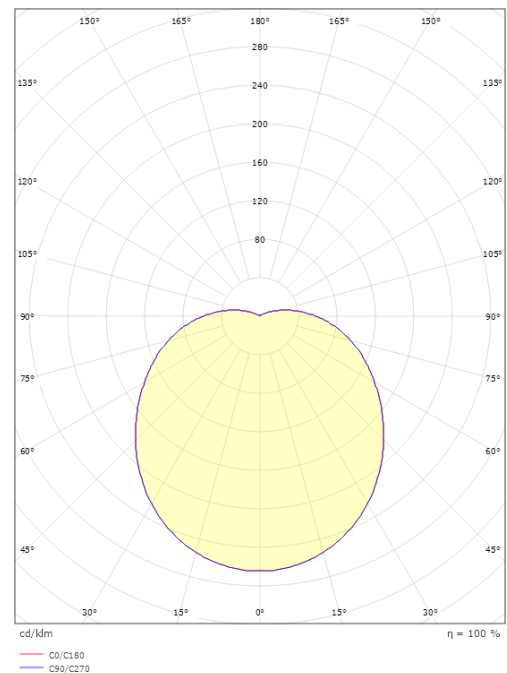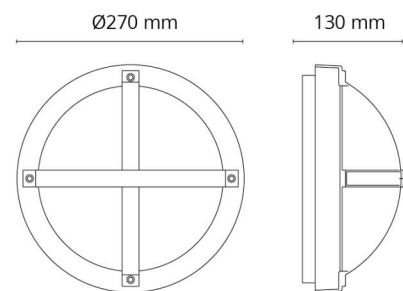

7 0 2 1 9 8 6 4 3 5 5 1 1