

Primo 1100 Black 740lm 3000K Ra>80 Trailing edge

Article code: 644570
EAN: 7021986445701



Electrical

System wattage: 10W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 33, B16: 52, C10: 40, C16: 64

Light technic

Type of light source: LED
Luminous flux: 740lm
Efficacy: 74 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L70/B10>50,000
Light distribution: Direct
Optic: Opal
Beam angle: 120°
Photobiological safety: RG 0

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class II
IK Class: IK10
IP Class: IP65
Fire protection class: 850°C - 30s

Energy and approvals

Contains light source of energy class: C
Breeam: Fulfil Hea 01 for flicker free lighting
BVB: Yes
Sunda Hus: C+

Materials and finish

Housing: Aluminium
Colour: Black (RAL 9004)
Optics: UV-stabilized polycarbonate

Mounting/Connection



Mounting: Surface, Indoor / Outdoor
Module: 1100
Connection: Screwless terminal block

Dimensions

Height (mm) H: 120
Diameter (mm) D: 270
Depth (D): 120
Weight (kg) gross/net: 1.95 / 1.74

Packaging

Packing dimensions (mm): 270 x 270 x 120

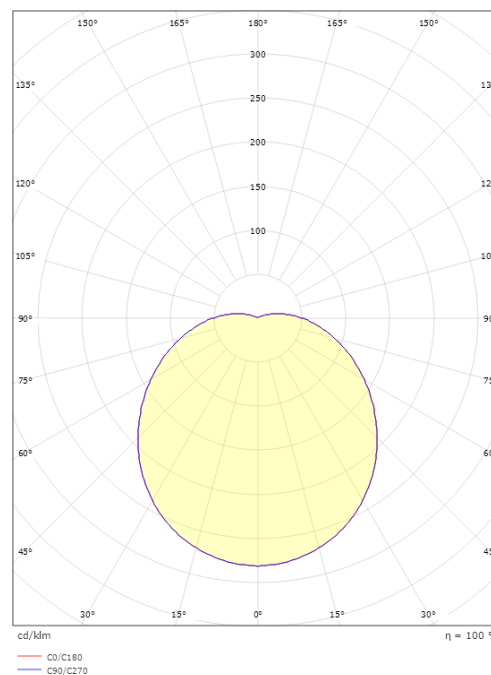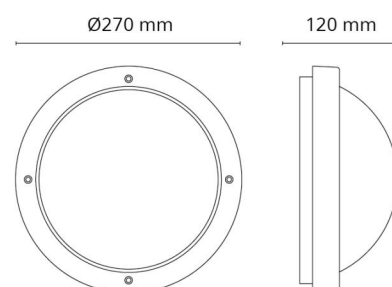

7 0 2 1 9 8 6 4 4 5 7 0 1