

## Uno 1100 Black 420lm 3000K Ra>80 Trailing edge

Article code: 644640  
EAN: 7021986446401



### Electrical

System wattage: 10W  
Voltage: 220-240V  
Max. luminaires per circuit breaker: B10: 33, B16: 52, C10: 40, C16: 64

### Light technic

Type of light source: LED  
Luminous flux: 420lm  
Efficacy: 42 lm/W  
Colour temperature: 3000K  
Colour rendering (Ra): Ra>80  
MacAdams factor: SDCM: 3  
Lifetime: L70/B10>50,000  
Light distribution: Direct  
Optic: Opal  
Beam angle: 120°

### Control/Dimming

Type: Trailing edge

### Protection

Luminaire class: Class II  
IK Class: IK10  
IP Class: IP65  
Fire protection class: 850°C - 30s

### Energy and approvals

Contains light source of energy class: C  
Breeam: Fulfils Hea 01 for flicker free lighting  
BVB: Yes  
Sunda Hus: C+

### Materials and finish

Housing: Aluminium  
Colour: Black (RAL 9004)  
Optics: UV-stabilized polycarbonate

### Mounting/Connection



Mounting: Surface, Indoor / Outdoor  
Module: 1100  
Connection: Screwless terminal block

### Dimensions

Diameter (mm) D: 270  
Depth (D): 130  
Weight (kg) gross/net: 1.848 / 1.743

### Packaging

Packing dimensions (mm): 270 x 270 x 142

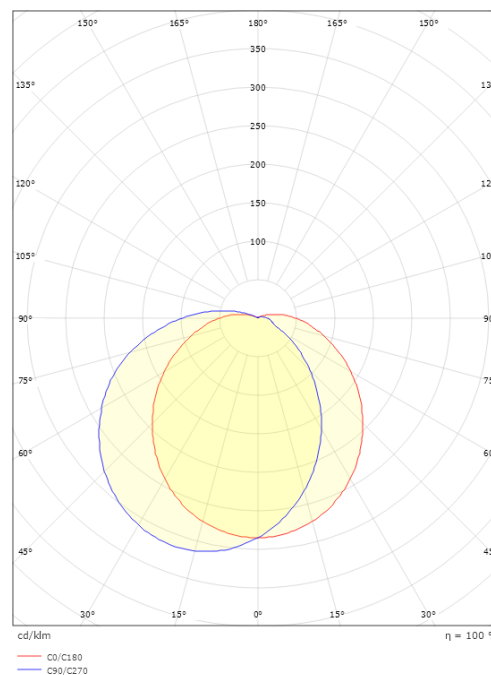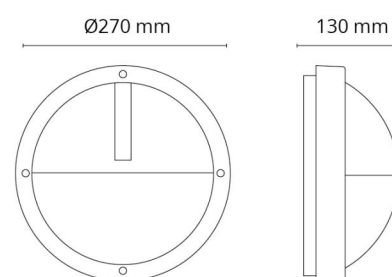

7 0 2 1 9 8 6 4 4 6 4 0 1