

Sidewalk



Sidewalk 2000 Black 1380lm 4000K Ra>80 Trailing edge

Article code:

644832

EAN:

7021986448320



Electrical

System wattage:

14W

Voltage:

220-240V

Light technic

Type of light source:

LED

Luminous flux:

1380lm

Efficacy:

99 lm/W

Colour temperature:

4000K

Colour rendering (Ra):

Ra>80

MacAdams factor:

SDCM: 3

Lifetime:

L70/B50>100,000

Light distribution:

Direct

Optic:

Opal

Beam angle:

110°

Control/Dimming

Type:

Trailing edge

Protection

Luminaire class:

Class I

IK Class:

IK10

IP Class:

IP65

Fire protection class:

850°C - 30s

Energy and approvals

Contains light source of energy class:

D

Breem:

Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing:

Aluminium

Colour:

Black (RAL 9004)

Optics:

UV-stabilized polycarbonate

Mounting/Connection

Mounting:

Surface, Indoor / Outdoor

Module:

2000

Connection:

Screwless terminal block

Dimensions

Length (mm) L:

300

Width (mm) W:

300

Height (mm) H:

87



Weight (kg) gross/net:

3 / 2.28

Packaging

Packing dimensions (mm):

310 x 310 x 100

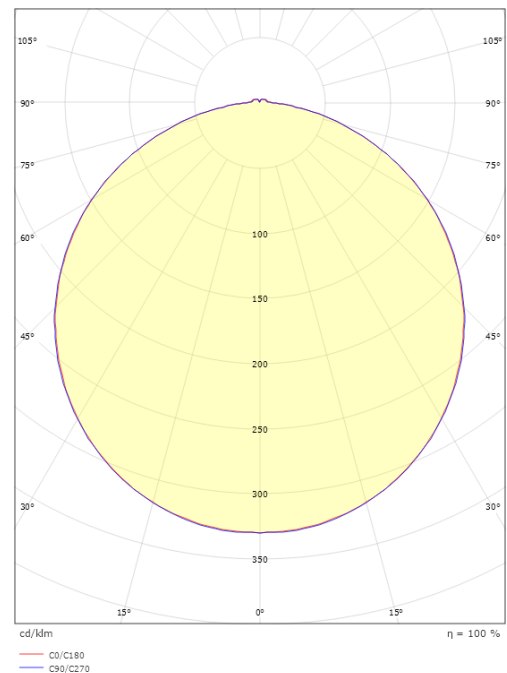

7 0 2 1 9 8 6 4 4 8 3 2 0