

Canto 2000 Black 1520lm 3000K Ra>80 Sensor

Article code: 644867
EAN: 7021986448672



Electrical

System wattage: 14W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 44, B16: 71, C10: 44, C16: 71

Light technic

Type of light source: LED
Luminous flux: 1520lm
Efficacy: 109 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L70/B50>100,000
Light distribution: Direct
Optic: Opal
Beam angle: 110°
Photobiological safety: RG 0

Control/Dimming

Type: Sensor

Protection

Luminaire class: Class I
IK Class: IK10
IP Class: IP65
Fire protection class: 850°C - 30s

Energy and approvals

Contains light source of energy class: C
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Colour: Black (RAL 9004)
Optics: UV-stabilized polycarbonate

Mounting/Connection


Mounting: Surface, Indoor / Outdoor
Module: 2000
Connection: Screwless terminal block

Dimensions


Height (mm) H: 120
Diameter (mm) D: 325
Weight (kg) gross/net: 3.2 / 2.338

Packaging

Packing dimensions (mm): 340 x 340 x 120



Sensor settings					
	1	1	2	3	4
	1	●	●	●	100%
	2	○	●	●	75%
	3	○	○	●	50%
	4	○	○	○	25%
	5	○	○	○	10%
	1	1	2	3	4
	1	●	●	●	5s
	2	○	●	●	30s
	3	○	○	●	1 min
	4	○	○	○	5 min
	5	○	○	○	15 min
	1	1	2	3	4
	1	●	●	●	2 Lux
	2	○	●	●	5 Lux
	3	○	○	●	10 Lux
	4	○	○	○	30 Lux
	5	○	○	○	50 Lux
	6	○	○	○	OFF

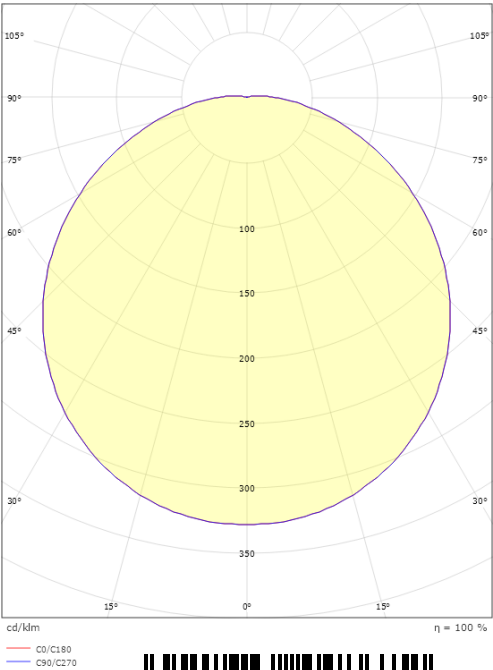

7 0 2 1 9 8 6 4 4 8 6 7 2