

Linus LED White 1890lm 4000K Ra>80 DALI-2 / Push Dim

Article code: 8246078788
EAN: 5703821162708



Electrical

System wattage: 14W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 13, B16: 20, C10: 21, C16: 34
Leakage current (mA): 0,07

Light technic

Type of light source: LED
Light source included: Yes
Luminous flux: 1890lm
Efficacy: 135 lm/W
Colour temperature: 4000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L90/B10>70,000
Lifetime: L94>50,000
Minimum ambient temperature: -25°C
Light distribution: Direct/Indirect 97/3%
Optic: Lens C, prismatic Conical
Visible flicker (PstLM): 0,16
Stroboscopic flicker (SVM): 0

Control/Dimming

Type: DALI-2 / Push Dim

Protection

Luminaire class: Class I
IP Class: IP20

Energy and approvals

Contains light source of energy class: C
Breeam: Fulfils Hea 01 for flicker free lighting
BVB: Yes
Sunda Hus: B

Materials and finish

Housing: Sheet steel
Colour: White (Pure white, 25% gloss)
Optics: Acrylic (PMMA)

Mounting/Connection



Mounting: Surface, Indoor
Connection: Screwless terminal block

Dimensions

Length (mm) L: 1170
Width (mm) W: 123
Height (mm) H: 90
Weight (kg) gross/net: 4.3 / 4.1

Packaging

Packing dimensions (mm): 1260 x 160 x 100

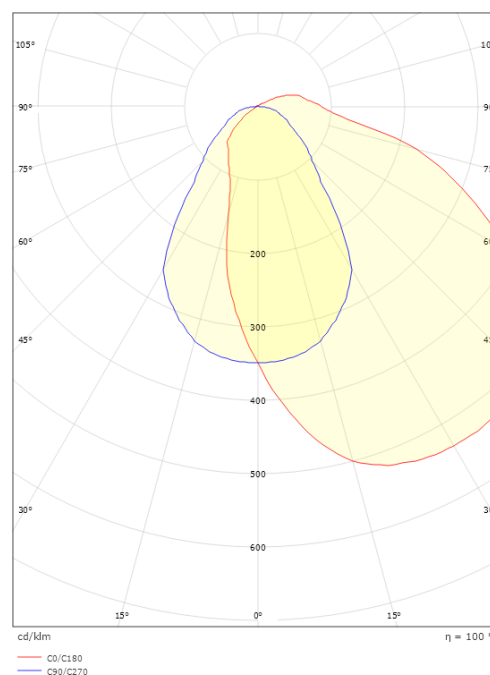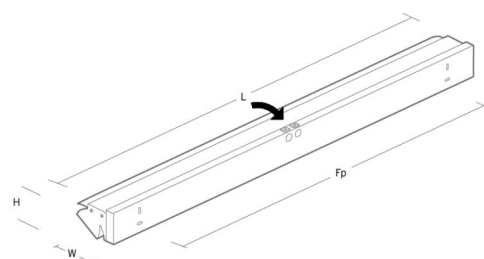

5 7 0 3 8 2 1 1 6 2 7 0 8