

Mirac LED



Mirac LED 600x600 White 2 line 2240lm 4000K Ra>80 DALI-2

Article code: 8246085373
EAN: 5703821166737



• = This article is produced by order, with an expected delivery time of 3-4 weeks.



Electrical

System wattage: 19W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 13, B16: 24, C10: 21, C16: 38

Light technic

Type of light source: LED
Luminous flux: 2240lm
Efficacy: 118 lm/W
Colour temperature: 4000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B10>50,000
Light distribution: Direct
Optic: Double parabolic louvre, satin matt
UGR: UGR<19

Control/Dimming

Type: DALI-2

Protection

Luminaire class: Class I
IP Class: IP20

Energy and approvals

Contains light source of energy class: C
Breem: Fulfil Hea 01 for flicker free lighting

Materials and finish

Housing: Sheet steel
Colour: White smooth (Ral 9016 gloss 30)
Optics: Aluminium

Mounting/Connection




Mounting: Recessed, Indoor
Module: 600x600 Exposed T-carrier 15/24mm
Connection: 5 pol Winsta / Terminal block

Dimensions

Length (mm) L: 595
Width (mm) W: 595
Height (mm) H: 63
Weight (kg) gross/net: 4.5 / 4.3

Packaging

Packing dimensions (mm): 630 x 619 x 67

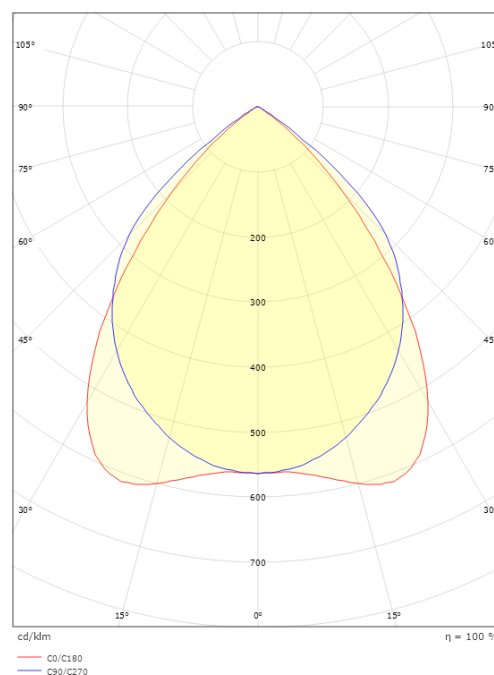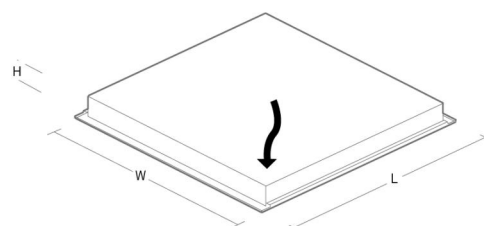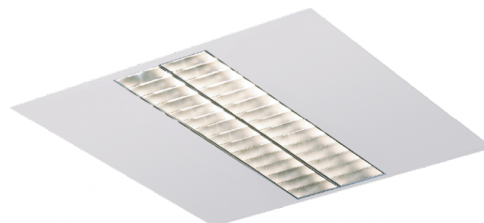

5 7 0 3 8 2 1 1 6 6 7 3 7