

CircLED Multi



CircLED Multi Grey Lens 2, Class II Top Adjustable 5-17° 3950lm 4000K Ra>70 DYNADIM Profil 1

Article code: 8246086482
EAN: 5703821166317

• = This article is produced by order, with an expected delivery time of 3-4 weeks.



Electrical

System wattage: 31W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 10, B16: 17, C10: 16, C16: 27

Light technic

Type of light source: LED
Luminous flux: 3950lm
Efficacy: 127 lm/W
Colour temperature: 4000K
Colour rendering (Ra): Ra>70
MacAdams factor: SDCM: 3
Lifetime: L80/B10>100,000
Light distribution: Multi Lens
Optic: Lens

Control/Dimming

Type: DYNADIM Profil 1

Protection

Luminaire class: Class II
IK Class: IK09
IP Class: IP66
Surge protection: Integrated (min. 4 kV)

Energy and approvals

Contains light source of energy class: C
Breem: Fulfils Hea 01 for flicker free lighting
ULOR (Yes / Yes, up to 17° tilt angle

Materials and finish

Housing: Die-cast aluminium
Colour: Grey (structure 2150 sablé)
Optics: Tempered glass

Mounting/Connection

Mounting: Post - adjustable head 5-17°, Outdoor
Cable: Cable 2x1mm² 6m
Wind projected area: 0,0415m² - Max 6,2 kg

Dimensions



Length (mm) L: 460
Width (mm) W: 390
Height (mm) H: 185
Weight (kg) gross/net: 8.2 / 8

Packaging

Packing dimensions (mm): 525 x 395 x 210

Explanatory text

Class II

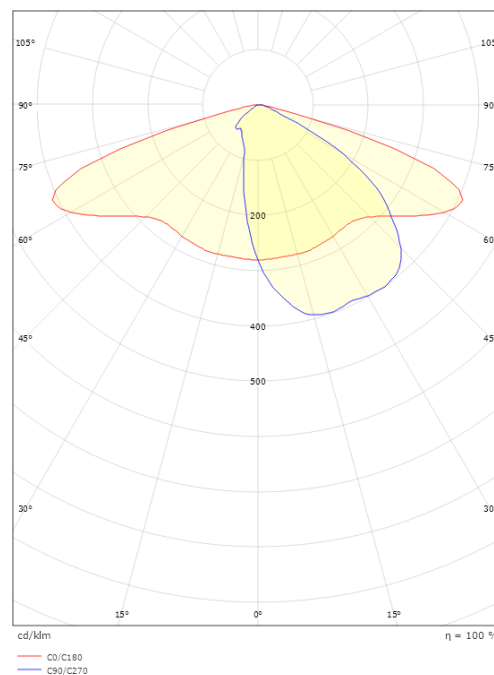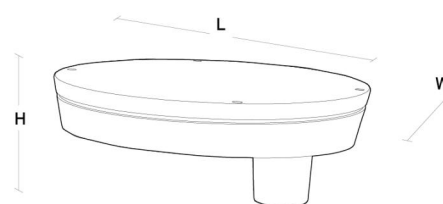

5 7 0 3 8 2 1 1 6 6 3 1 7