

Basic White 8030lm 3000K Ra>80 On/Off

Article code: 8246087562
EAN: 5703821168427



Electrical

System wattage: 46W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 15, B16: 24, C10: 25, C16: 41
Leakage current (mA): 0.54

Light technic

Type of light source: LED
Luminous flux: 8030lm
Efficacy: 175 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B10>50,000
Minimum ambient temperature: 0°C
Light distribution: Direct
Optic: Opal optic
UGR: UGR<25

Control/Dimming

Type: On/Off

Protection

Luminaire class: Class I
IP Class: IP20

Energy and approvals

Contains light source of energy class: C
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Sheet steel
Colour: White (Pure white, 25% gloss)
Optics: Acrylic (PMMA)

Mounting/Connection




Mounting: Surface, Indoor
Connection: Screwless terminal block

Dimensions

Length (mm) L: 1530
Width (mm) W: 230
Height (mm) H: 85
Weight (kg) gross/net: 7.7 / 7.5

Packaging

Packing dimensions (mm): 1550 x 250 x 95

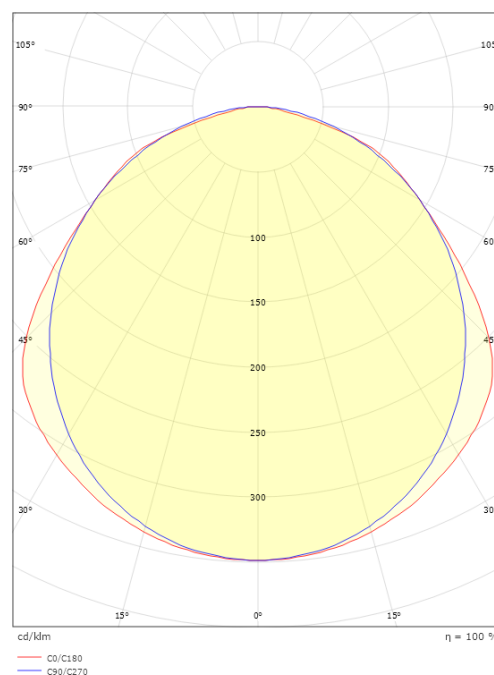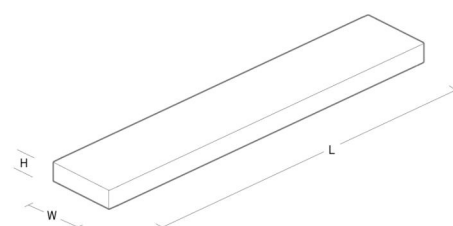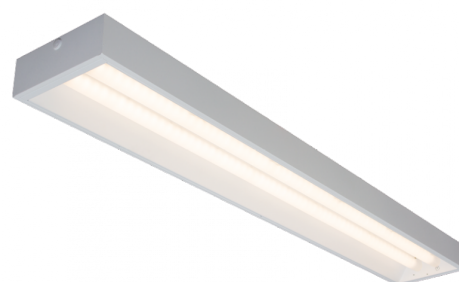

5 7 0 3 8 2 1 1 6 8 4 2 7