

Place Grey 2510lm 4000K Ra>80 DYNADIM

Article code: 8246088228
 EAN: 5703821168090


Electrical

System wattage: 28W
 Voltage: 220-240V
 Max. luminaires per circuit breaker: B10: 10, B16: 17, C10: 16, C16: 27

Light technic

Type of light source: LED
 Luminous flux: 2510lm
 Efficacy: 90 lm/W
 Colour temperature: 4000K
 Colour rendering (Ra): Ra>80
 MacAdams factor: SDCM: 3
 Lifetime: L90/B10>50,000
 Lifetime: L70/B10>100,000
 Light distribution: Direct

Control/Dimming

Type: DYNADIM

Protection

Luminaire class: Class II
 IK Class: IK10
 IP Class: IP66
 Surge protection: Integrated (min. 4 kV)

Energy and approvals

Contains light source of energy class: B
 BVB: Yes
 Sunda Hus: C+

Materials and finish

Housing: Die-cast aluminium
 Colour: Grey (structure 2150 sablé)
 Optics: Polycarbonat (PC)

Mounting/Connection



Mounting: Post - top (Ø60mm), Outdoor
 Cable: Cable 2x1mm² 6m
 Wind projected area: 0,0775m² - Max 10 kg

Dimensions

Height (mm) H: 291
 Diameter (mm) D: 600
 Weight (kg) gross/net: 7.6 / 7.41

Packaging

Packing dimensions (mm): 625 x 625 x 300

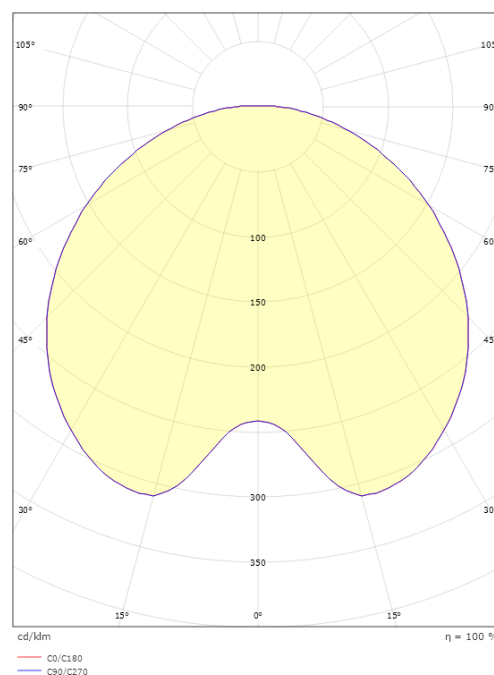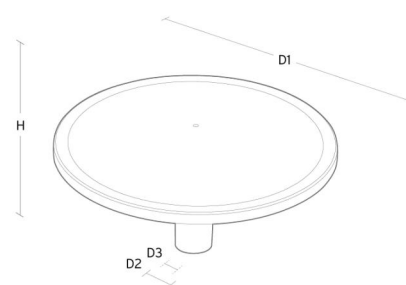

5 7 0 3 8 2 1 1 6 8 0 9 0