

## EcoLine Office 1200 White 2350lm 3000K Ra>80 DALI-2

Article code: 8246089560  
EAN: 5703821176170



• = This article is produced by order, with an expected delivery time of 3-4 weeks.



### Electrical

Wattage: 18W  
System wattage: 18W  
Voltage: 220-240V  
Max. luminaires per circuit breaker: B10: 13, B16: 20, C10: 21, C16: 34  
Leakage current (mA): 0,07

### Light technic

Type of light source: LED  
Luminous flux: 2350lm  
Efficacy: 131 lm/W  
Colour temperature: 3000K  
Colour rendering (Ra): Ra>80  
MacAdams factor: SDCM: 3  
Lifetime: L80/B10>50,000  
Light distribution: Direct  
Optic: Double parabolic louvre, satin matt  
UGR: UGR<19  
Visible flicker (PstLM): 0,03  
Stroboscopic flicker (SVM): 0

### Control/Dimming

Type: DALI-2

### Protection

Luminaire class: Class I  
IP Class: IP20

### Energy and approvals

Contains light source of energy class: C  
Breem: Fulfil Hea 01 for flicker free lighting

### Materials and finish

Housing: Sheet steel  
Colour: White (Pure white, 25% gloss)  
Optics: Aluminium

### Mounting/Connection



Mounting: Suspended or surface, Indoor  
Module: 1200  
Connection: Screwless terminal block

### Dimensions

Length (mm) L: 1200  
Width (mm) W: 142  
Height (mm) H: 63  
Weight (kg) gross/net: 5.7 / 5.5

### Packaging

Packing dimensions (mm): 1215 x 146 x 68

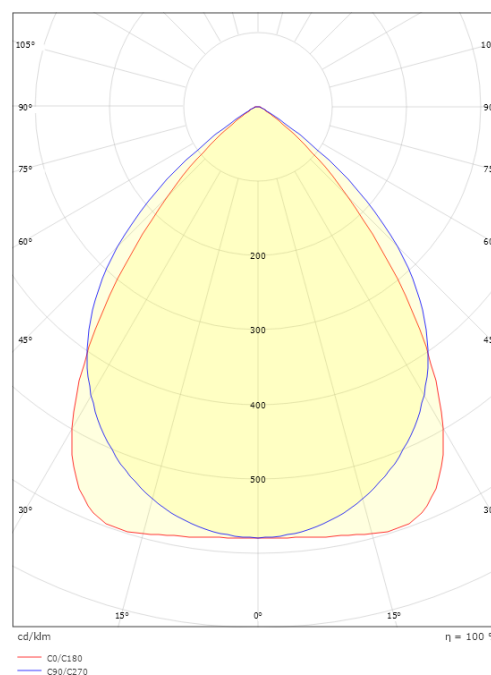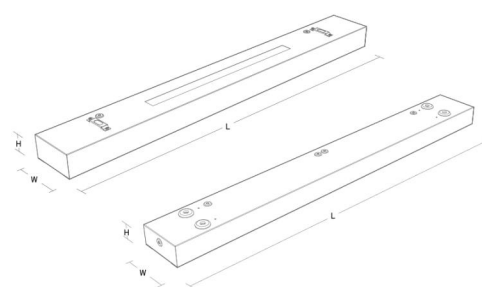

5 7 0 3 8 2 1 1 7 6 1 7 0